





The Swedish Chemicals Group is a part of RISE



TABLE OF CONTENTS

PREFACE 5

```
EXPLANATORY SECTION
Word list 6
Test equipment abbreviations
Relationship between units used in the guide
Relationship between surface concentration and total concentration (relevant for PFAS restrictions for example) 8
Product and material categories concerned
PROCESS CHEMICALS
Alkylphenol ethoxylates (APEO) and derivatives 9
Arsenic compounds
Bisphenols 12
C,C'-azodi(formamide) (ADCA)
                                  13
Ethylenediamine (EDA) 14
Ethylenethiourea
Formamide 16
Hydrazine 17
PAH - Polycyclic aromatic hydrocarbons
                                             18
Quinoline 20
Solvents - Aliphatic organic solvents 21
Solvents - Aromatic organic solvents 22
Solvents - Chlorinated organic solvents
                                             23
Solvents - DMFa (N,N-dimethylformamide)
                                             25
Solvents - DMAC (N,N-dimethylacetamide)
                                             26
Solvents - NMP (N-methyl-2-pyrrolidone)
                                             27
Tin organic compounds (Organostannic compounds)
                                                         28
PRODUCT-RELATED (PROPERTY-LENDING) CHEMICALS
                                                                    29
Allergenic dyes
Banned arylamines related to azo dyes
Benzotriazols (UV-320, UV-327, UV-328 and UV-350)
3-benzylidene camphor; 3-BC (1,7,7-trimethyl-3-(phenylmethylene)bicyclo[2.2.1] heptan-2-one)
                                                                                           32
Cadmium (Cd) and cadmium salts 33
CMR, Carcinogenic, Mutagenic, Reproductive toxic dyestuffs 35
Chromium VI
                      36
Flame retardants/Biocides - Boric acid, borate compounds
Flame retardants/Plasticizer - Chloroparaffins
Flame retardants - Dechlorane™ Plus
Flame retardants - Hexabromocyclododecan (HBCDD)
Flame retardants - Polybrominated biphenyls (PBB) and Polybrominated diphenyl ethers (PBDE) 42
Flame retardants – TCEP
Flame retardants - Trisubstituted phosphates
Formaldehyde
Lead (Pb) and lead salts 48
Mercury
          50
Nickel (Ni), in accessories
PFAS - Highly fluorinated carboxylic acids (PFOA and related substances) 52
PFAS - Highly fluorinated sulfonic acids (PFOS and related substances) 54
PFAS - Highly fluorinated ethers
Phthalate esters
Siloxanes 59
```

General information 60 Cu-HDO (Bis-(N-cyclohexyldiazeniumdioxy) -copper) 60 Carbendazim Dimetylfumarate (DMFu)62 Glutaral 63 Guanidine, N,N"'-1,6-hexanediylbis[N'-cyano-, polymer with 1,6-hexanediamine, hydrochloride (PHMB 1600; 1.8) Parabenes 65 Pentachlorophenol (PCP) and all isomers of Tetrachlorphenols (TeCP) 66 Permethrin 67 Silver and its compounds Trisubstituted tin organic compounds 69 Triclosan and Triclocarban Zincpyrithion **MISCELLANEOUS** 72 72 Proposition 65: Other chemicals listed with relevance to the materials referred to in this guidance document Obsolete substances: Historically relevant substances, no longer in use. 74 **APPENDICES** 75 Appendix 1 - Allergenic dyestuffs and Navy Blue (banned mordant dye) 76 Appendix 2 - Banned arylamines 77 Appendix 3 - Carcinogenic dye stuffs Appendix 4 - Non exhaustive list of DBTs (dibutyl tin substances) 79 Appendix 5 - Chromium (VI) SVHC compounds 80 Appendix 6 - SVHC lead metal and its compounds 81 Appendix 7 - Regulations and limit values of formaldehyde 82 Appendix 8 - Phthalate esters

Appendix 9 - PAH - Polycyclic aromatic hydrocarbons

BIOCIDAL AGENTS 60

PREFACE

This guide is developed to facilitate for importing companies to comply with the chemical legislation and recommendations in force in the fields of textiles, clothes, leather goods, shoes and packaging material. By requiring that their suppliers follow these guidelines, and thereby avoiding importing products containing unwanted substances, human health and the environment are protected in producing, supplying and importing countries. Import of the mentioned products from, in particular, developing countries to the European Union (EU) and EEA is also facilitated and promoted by this guide.

The guide covers all harmonized chemicals EU-regulation affecting textile and leather products. The distinguishing properties of the chemicals and the processes in which they are used are described in the guide.

The stipulated test equipment is commonly occurring, and the quantification limits (LOQ) are generally accepted. Please note that when limit values are given, possible contamination by the external environment and inaccuracy in the measurement of very low concentration must be taken into consideration.

Recommended substitutes are less harmful while providing the desired effect or property.

The guide exists in several languages. To facilitate communication, the contents on each page are identical in each linguistic version. The English version of this guide is preferential for interpretation.

EXPLANATORY SECTION

Word list

Required limit value: Limit value as agreed in business sector and or by legal requirements. Note

that limit value is measured in products. Weight percent shall be calculated

from the weight of the whole product if nothing else is stated.

CAS RN: Chemical abstract services registration number.

CAS RN are given for specific defined substances.

Properties: Human toxicological and Eco toxicological properties.

Use: Identified uses on the market.

Comments: Information on known alternatives and recommendations on how to avoid

unwanted chemicals.

Detection limit: Limit of detection (LOD). Lowest concentration the test equipment is able

to detect. This can vary between different test laboratories. Note that detection limit is not relevant as required limit values for all substances as

the background concentrations can be notably higher.

Legal background: Current legal international and national framework and requirements.

Substances listed on Candidate List of Substances of Very High Concern for authorization of the Regulation (EC) No 1907/2006 (REACH) leads to information duty if the concentration is above 0.1 weight-% (1000 mg/kg).

MADL: Maximum Allowable Dose Levels. Safe harbor levels for chemicals

causing reproductive toxicity in Proposition 65.

NSRL: No Significant Risk Levels. Safe harbor levels for cancer-causing

chemicals in Proposition 65.

Quantification limit: Limit of quantification (LOQ). The smallest concentration of an analyte that

can be reliably measured by an analytical procedure.

Test method: Standardized test method if such exists. ISO/EN standards are prioritized

over national or commercial standards. Test equipment if no standardized test method exists. Abbreviations of recommended test equipment are explained below. All substances in a chemical group may not be legally regulated, but still included as a chemical group in this guide. As it can distinguish between different laboratories which substances besides the legal restricted, they offer test for, this should be confirmed before ordering.

Packaging material: According to Directive (EC) No 94/62/EC of 20 December 1994 on packaging

and packaging waste. The directive regulates substances in packaging material; meaning all products made of any materials of any nature to be used for the containment, protection, handling, delivery and presentation of goods, from raw materials to processed goods, from the producer to

the user or the consumer.

Test equipment abbreviations

ANALYSIS OF ORGANIC COMPOUNDS

• Gas chromatography: GC

Detectors used together with GC:

- MS: Mass selective detector: GC-MS

- DAD: Diode array detector: GC-DAD

- ECD: Electron capture detector: GC-ECD

• Liquid chromatography: LC

Note: Sometimes the abbreviation HPLC is used.

It stands for High Performance Liquid Chromatography.

Detectors used together with LC:

- MS: Mass selective detector: LC-MS

- DAD: Diode array detector: LC-DAD

- ECD: Electron capture detector: LC-ECD

- UV/VIS: Ultraviolet/visible spectrophotometric detector: LC-UV/VIS

ANALYSES OF METALS

• Inductively Coupled Plasma Spectrometry: ICP

Detectors together with ICP:

- OES: Optical emission spectrometer: ICP-OES

- MS: Mass selective detector: ICP-MS

· Atomic absorption spectrophotometer: AAS

SCREENING ANALYSES OF ELEMENTS

• X-ray fluorescence, XRF

Relationship between units used in the guide

1000	mg/kg	equals	1000 1 000 000 1 000 000	ppm ppb µg/kg	(parts per million) (parts per billion) (microgram per kilogram)
			0.1	% (by weight)	
			х	μg/m²	x depends on the thickness of the fabric (kg/m²)
			X	μg/cm² /week	x is a measure of the release of a substance from a surface, and is only partially dependent on the concentration of the substance

Relationship between surface concentration and total concentration (relevant for PFAS restrictions for example)

Substance [µg/m²]	Surface weight [g/m²]		Substance [ppb = µg/kg]
1	40	equals	25
2.5	100	equals	25
5	200	equals	25
Substance [ppb = µg/kg]	Surface weight [g/m²]		Substance [µg/m²]
	Surface weight [g/m²]	equals	Substance [µg/m²]
μg/kg]	0 10 1	equals equals	Substance [µg/m²] 1 2.5

Product and material categories concerned

All chemicals are not used in all materials. A general division into the categories listed below has therefore been made that may be applicable to several kinds of articles due to their material composition.

	*		8
Textile Textile material, both natural and synthetic fibres	Leather Leather, both natural and leather imitation	Accessories Metal, plastics, rubber etc. used in e.g. buckles, buttons, jewellery and zippers.	Packaging Packaging material in accordance with the Packaging Directive 94/62/EC. Paper cardboard, plastic bags, tags, labels, plastic sleeves etc.

PROCESS CHEMICALS

Process chemicals are used in the manufacturing process of the textile and leather goods but have no function in the finished product. Remains of the process chemicals may however be found in the finished product and cause health or environmental problems.

Alkylphenol ethoxylates (APEO) and derivatives





The most common APEOs are Nonylphenol ethoxylates (NPEO) and Octylphenol ethoxylates (OPEO).

Required limit value:	Should not be used in processes. Occurrence in products below 100 mg/kg (0.01%) for total APEO is regarded as unintended residues (contaminants) which cannot be controlled.
CAS RN:	Various
Properties:	Irritating to skin. The metabolites affect the respiratory system, have endocrine disruptive effect (hormones) and are dangerous for the environment. Nonylphenol ethoxylates are rapidly degraded to 4-nonylphenol, which is even more dangerous for the environment. A similar environmental danger is the degradation of octylphenol ethoxylate into 4-octylphenol.
Use:	Dispersing and emulsifying agents in textile chemicals as well as impregnation agents in printing pastes. Occurs in leather lubricants. Manufacturing of coatings.
Comments:	The main alternatives for NPEOs include aliphatic alcohol ethoxylates, both linear and branched, and glucose-based carbohydrate derivatives such as alkylpolyglucoside, glucamides, and glucamine oxides.
Legal background:	Legal limit: 0.1% by weight for nonylphenol ethoxylate (NPEO) as a substance or constituent of preparations (closed systems exempted), entry 46. NPEOs shall not be placed on the market in textile articles, in concentrations equal to or greater than 0.01% by weight of that textile article or of each part of the textile article. Annex XVII of Regulation (EC) No 1907/2006 (REACH), entry 46a.

Norway restricts manufacture, import, export, sale and use of octylphenol and octylphenol ethoxylates, and mixtures containing

these substances, FOR 2004-06-01-922.

4-Nonylphenol, branched and linear (4-NP, various CAS RN), 4-Nonylphenol, branched and linear, ethoxylated (4-NPnEO, various CAS RN), 4-(1,1,3,3-tetramethylbutyl)phenol (4-tert-OP, CAS RN 140-66-9), 4-(1,1,3,3-tetramethylbutyl)phenol, ethoxylated (4-tert-OPnEO, UVCB substance, no CAS RN), 4-tert-butylphenol (CAS RN 98-54-4) and tris(4-nonylphenyl, branched and linear) phosphite (TNPP) with = 0.1% w/w of 4-nonylphenol, branched and linear (4-NP) (no CAS RN) are listed on the Candidate List of Substances of Very High Concern for authorization of the Regulation (EC) No 1907/2006 (REACH).

 $\mbox{4-NPnEO}$ and $\mbox{4-tert-OPnEO}$ are also included in Annex XIV to REACH.

Prop 65: APEOs are not listed under Proposition 65.

Test method:

ISO 18254 (textile), APEO EN ISO 21084 (textile), AP ISO 18218-1 (leather)

LOQ: 10 mg/kg

Arsenic compounds







Required limit value: Should not be present in products. CAS RN: Various Properties: May cause cancer. Toxic by inhalation and toxic if swallowed. Persistent, bioaccumulative and toxic. Use: Fining agent in glass, pigment in metal alloy, preservative. Comments: Apply arsenic free compounds. Diarsenic Pentoxide; 1303-28-2 Legal limit: Diarsenic Trioxide; 1327-53-3 Triethyl arsenate; 15606-95-8 Arsenic acid; 7778-39-4 Calcium arsenate; 7778-44-1 are listed on the Candidate List of Substances of Very High Concern for authorization of the Regulation (EC) No 1907/2006 (REACH). As wood preservatives regulated in Annex XVII of Regulation (EC) No 1907/2006 (REACH), entry 19 (limit level; no intentionally added content). Arsenic and its compounds have a restriction limit of 1 mg/kg (extractable content) in clothing, related accessories, textiles other than clothing in skin contact, or footwear (CMR fast track) according to Annex XVII of Regulation (EC) No 1907/2006 (REACH), entry 72. The CMR fast track restriction does not apply to clothing, related accessories, textiles other than clothing, or footwear within the scope of Regulation (EU) 2016/425 (PPE). Prop 65: Inorganic arsenic compounds are known to the State of California to cause cancer. Safe Harbor Limit: NSRL 0.06 µg/day (inhalation), 10 µg/day (except inhalation). No information on settlements. Inorganic arsenic oxides are known to the State of California to cause birth defects or other reproductive harm. Safe Harbor Limit: None. No information on settlements.

Test method:

EN 16711-1 (total content in textiles).
EN 16711-2 (extractable content in textiles).
(Coated fabrics and garment components (e.g. buttons, zips, etc.) can also be tested by these method.)

LOQ: 0.1 mg/kg (extractable content)

Bisphenols





Required limit value: Should not be present in products. CAS RN: Bisphenol A; BPA (4,4'-isopropylidenediphenol): 80-05-7 2,2-bis(4'-hydroxyphenyl)-4-methylpentane: 6807-17-6 Bisphenol B; (4,4'-(1-methylpropylidene)bisphenol): 77-40-7 Properties: Toxic for reproduction. Endocrine disrupting properties. Use: Mainly used in manufacture of polycarbonate epoxy resins and chemicals; hardener in epoxy resins and in thermal prints. May be used as catalyst and antioxidant for processing PVC. Comments: Left as residues in polycarbonate and epoxy. Can be found in products with material based on plastic and paper. BPA, Bisphenol B and 2,2-bis(4'-hydroxyphenyl)-4-methylpentane Legal background: are listed on the Candidate List of Substances of Very High Concern for authorization of the Regulation (EC) No 1907/2006 (REACH). Bisphenol A (BPA) content in thermal paper (0.02% by weight), is restricted from January 2020 according to Annex XVII of Regulation (EC) No 1907/2006 (REACH), entry 66. Prop 65: BPA is known to the State of California to cause birth defects or other reproductive harm. Safe Harbor Limit: MADL 3 µg/day (dermal exposure from solid materials). Settlements agreed at 3 ppm, 20 ppm or zero limit for various products. Test method: No standardised test method available.

Test equipment LC-MS, GC-MS. LOQ: 10 mg/kg

C,C'-azodi(formamide) (ADCA)



Test method:

Required limit value: Should not be used in processes or present in products. CAS RN: 123-77-3 Properties: Respiratory sensitizer. Use: Azodicarbonamide, or azodiformamide is mainly used as a chemical blowing agent in the rubber and plastics industry. Blowing agent in especially EVA and PVC. Comments: Can leave residues of formamide in the material. ADCA may decompose into semicarbazide, a suspected carcinogen. Use physical blowing agents such as carbondioxide, hydrocarbons or nitrogen as alternative to chemical blowing agents when possible. Legal background: ADCA is listed on the Candidate List of Substances of Very High Concern for authorization of the Regulation (EC) No 1907/2006 (REACH).

Test equipment: GC-MS, LC-MS

No standardised test method available for textiles.

LOQ: 200 mg/kg

Ethylenediamine (EDA)





Required limit value: Should not be present in products.

CAS RN: 107-15-3

Properties: Respiratory and skin sensitizer.

Use: Used in the production of many industrial chemicals. Used in the

production of polyurethane fibres.

Legal background: Ethylenediamine is listed on the Candidate list of Substances of Very

High Concern (SVHC) for the authorization of the Regulation (EC) No

1907/2006 (REACH).

Test method: No standardised test method available.

Test equipment: LC-MS, GC-MS

LOQ: 100 mg/kg

Ethylenethiourea



Test method:

Required limit value: Should not be present in products. CAS RN: Imidazolidine-2-thione (2-imidazoline-2-thiol) also called ethylenethiourea: 96-45-7 Properties: Toxic for reproduction. Used primarily as an accelerator for vulcanizing rubber. Use: Legal background: Ethylenethiourea is listed on the Candidate list of Substances of Very High Concern (SVHC) for the authorization of the Regulation (EC) No 1907/2006 (REACH). Prop 65: Ethylenethiourea is known to the State of California to cause cancer and birth defects or other reproductive harm Safe Harbor Limit: NSRL 20 µg/day. None for reproductive harm. No information on settlements.

Test equipment: LC-MS LOQ: 20 mg/kg

No standardised test method available.

Formamide





Required limit value: Should not be present in products.

CAS RN: 75-12-7

Properties: Toxic for reproduction.

Use: Formamide is used as so

Formamide is used as solvent for example in the production of synthetic leather and inks. Furthermore, formamide is used as a solvent and plasticizer in consumer products. It can be an ingredient as softener for paper, water soluble glues and wood stains. During processing of foam, formamide is formed as a by-product at higher temperatures. Especially tosylsemicarbazide and azodicarbonamide (see headline ADCA above) are responsible for the presence of formamide in EVA-consumer products.

Comments: For the application as solvent, formamide might be replaced by

other solvents like dipropylene glycol.

Potential alternatives as N,N-dimethylformamide, N-methylformamide or ethylene glycol ethers are not considered to be adequate substitutes due their similar toxicity to reproduction.

Legal background:

Formamide is listed on the Candidate List of Substances of Very
High Concern for authorization of the Regulation (EC) No 1907/2006

(REACH).

Formamide is restricted in puzzle mats in Belgium and France and is included in the Toy Safety Directive (limit value 200 mg/kg).

Test method: No standardised test method available.

Solvent extraction. Test equipment: GC-MS or LC-MS

LOQ: 50 mg/kg

Hydrazine





Required limit value: Should not be used in processes or present in products. CAS RN: Hydrazine: 302-01-2, 7803-57-8 Properties: Carcinogenic, allergenic, toxic. Use: Mainly used as a chemical blowing agent in preparing polymer foams. Comments: Use physical blowing agents such as carbondioxide, hydrocarbons or nitrogen as alternative to chemical blowing agents when possible Legal background: Hydrazine is listed on the Candidate list of Substances of Very High Concern (SVHC) for the authorization of the Regulation (EC) No 1907/2006 (REACH). Prop 65: Hydrazine is known to the State of California to cause cancer. Safe Harbor Limit: NSRL 0.04 µg/day. No information on settlements. Test method: No standardised test method available for textiles. Test equipment: UV-VIS Spectrometer. Detection limit: There is no standard international

> Test equipment: GC-MS LOQ: 200 mg/kg

detection limit yet.

PAH - Polycyclic aromatic hydrocarbons





Required limit value: Should not be used in processes or present in products. CAS RN: Various, regulated PAHs are listed in Appendix 9. Carcinogenic, allergenic, toxic. Several are persistent, bioaccumu-Properties: lative and toxic in the environment. PAHs are not synthesized chemically for industrial purposes. Use: The major source of PAHs is the incomplete combustion of organic material such as coal, oil and wood. They are used as intermediaries in pharmaceuticals, agricultural products, photographic products, thermosetting plastics, lubricating materials, and other chemical industries. May be found as impurities in rubber materials, soft plastics, leather, and colored plastics containing carbon black. Avoid critical sources for PAH such as Carbon Black and conta-Comments: minated mineral oil-based lubricants (extender oil) in rubber.

Legal background:

Regulated PAHs are listed in Appendix 9.

Eight PAHs are listed in annex XVII, entry 50 of the Regulation (EC) No 1907/2006 (REACH). Rubber and plastic materials in skin contact shall not include any of those eight PAHs in amounts higher than 1 mg/kg. For materials in toys or childcare articles the limit value is 0.5 mg/kg.

Eight PAHs are listed in annex XVII, entry 72 (CMR fast track) of the Regulation (EC) No 1907/2006 (REACH), with a restriction limit of 1 mg/kg in clothing, related accessories, textiles other than clothing in skin contact, or footwear.

The CMR fast track restriction does not apply to clothing, related accessories, textiles other than clothing, or footwear within the scope of Regulation (EU) 2016/425 (PPE).

Ten PAHs are included in the Candidate list of Substances of Very High Concern (SVHC) for the authorization of the Regulation (EC) No 1907/2006 (REACH).

The voluntary German GS standard that most products in the German market follows, has requirements for 16 PAHs.

Prop 65: Several PAH are known to the State of California to cause cancer. Safe Harbor Limit: NSRL 0.033-0.35 $\mu g/day$. No information on settlements.

Test method:

AfPS GS 2019-01 PAK ISO/TS 16190 (footwear) EN 17132 (textile) LOQ: 0.2 mg/kg

Quinoline







Required limit value: Should not be present in products.

CAS RN: 91-22-5

Properties: Carcinogenic and mutagenic.

Use:

Quinoline is used mainly as an intermediate in the manufacture of other products. Quinoline is also used as a catalyst or vulcanisation accelerator in rubber, a corrosion inhibitor, in metallurgical

processes, in the manufacture of dyes,

in polymers, and as a solvent for resins and terpenes. Many disperse and vat dyes may contain quinoline as a contaminate in

their dispersing agents.

Comments: Isoquinoline (CAS RN 119-65-3) with similar structure (and concerns) as quinoline, and other quinoline derivates have similar

area of use.

Legal background: Quinoline have a restriction limit of 50 mg/kg in clothing, related

accessories, textiles other than clothing in skin contact, or footwear (CMR fast track) according to Annex XVII of Regulation (EC) No 1907/2006 (REACH), entry 72. The CMR fast track restriction does not apply to clothing, related accessories, textiles other than clothing, or footwear within the scope of Regulation (EU) 2016/425

(PPE).

Prop 65: Quinoline is known to the State of California to cause

cancer. Safe Harbor Limit: None. No information on settlements.

Test method: No standardised test method available for textiles or leather.

Test equipment: GC-MS, LC-MS.

LOQ: 10 mg/kg

Solvents - Aliphatic organic solvents





Required limit value: No odour.

CAS RN: Various

Properties:

Liquids or gases. Inhalation can affect the nervous system and cause headache, fatigue and nausea, as well as chronic effects.

Cause irritation on skin, eyes and mucous membranes.

Use:

Solvents for dyeing and printing. Solvents that have been used for cleaning of spinning oils from textiles are often found in amounts of 10-20 mg/kg. The limit for humans to sense a smell lies around

100 mg/kg for most substances.

Comments: If possible, chose water-based systems based on easily degra-

dable surfactants. If not possible to switch over to water basedwater-based systems, there are statutory hygienic limit values for employees in many countries for strict compliance to maintain

workers safety

Legal background: 2-methoxyethyl acetate, CAS RN 110-49-6, and formamide, CAS

RN 75-12-7, are two aliphatic solvents listed on the Candidate List of Substances of Very High Concern for authorization of the

Regulation (EC) No 1907/2006 (REACH).

Test method: SNV 195 651, screening method. Panel odour test.

Detection limit: No odour.

No standardised quantitative test method available.

Test equipment: GC-MS

Solvents - Aromatic organic solvents

Solvents Alomati	o organic solvents
Required limit value:	Should not be present in products.
CAS RN:	Various
Properties:	Liquids or gases. Inhalation can affect the nervous system and cause headache, fatigue and nausea, as well as chronic effects. Cause irritation on skin, eyes and mucous membranes. Kerosene and diesel odour in finished products. Some aromatic organic compounds are carcinogenic.
Use:	Solvents for dyeing and printing. Stain removal. Coatings and binders.
Comments:	To avoid problems with organic solvents, switching to water-based dyeing and printing processes, based on easily degradable surfactants, is recommended. Many but not all Aaromatic organic solvents are volatile organic compounds (VOC). If not possible to switch over to water based systems, there are statutory hygienic limit values for employees in many countries for strict compliance to maintain workers safety.
	Replace simple aromatic hydrocarbons (petrol) with low-molecular- weight aliphatic hydrocarbons. To avoid problems with organic solvents, switching to water-based dyeing and printing processes is recommended.
Legal background:	Benzene (CAS RN 71-43-2) have a restriction limit of 5 mg/kg in clothing, related accessories, textiles other than clothing in skin contact, or footwear (CMR fast track) according to Annex XVII of Regulation (EC) No 1907/2006 (REACH), entry 72. The CMR fast track restriction does not apply to clothing, related accessories, textiles other than clothing, or footwear within the scope of Regulation (EU) 2016/425 (PPE). Manufacturers in the EU are required to follow the Industry
	Emissions Directive "IED", 2010/75/EU.

Prop 65: Benzene is known to the State of California to cause cancer and birth defects or other reproductive harm. Safe Harbor Limit: NSRL 6.4 μ g/day (oral), 13 μ g/day (inhalation). MADL: 24 μ g/day (oral), 49 μ g/day (inhalation). No information on settlements.

Test method:

SNV 195 651, screening method. Panel odour test. Detection limit: No odour.

No standardised quantitative test method available.
Test equipment: GC-MS
(EN 17137 (textile) can be used as reference for in-house methods though it only applies to chlorobenzenes and chlorotoluenes)
LOQ: 0.5 mg/kg

Solvents - Chlorinated organic solvents



Required limit value: Should not be used in processes or present in products.

CAS RN: Various

Properties: Liquid or gas. Affect the nervous system. Irritating to skin and mucous membranes. Many chlorinated organic solvents are

dangerous for the environment.

Solvents used in the manufacture of rubber, metal paint and fur industry used for grease and oil, e.g. in stain removers. Also used in cleaning agents and detergents. Solvents in lubricating oils. Solvents in dyeing of synthetic fibres (carriers) at atmospheric pressure. Solvents in printing. Finishing agents. Fabric softeners. Also used as moth-proofing agent in textiles and for the manufac-

ture of silk and pearls.

See also under heading "Flame retardants".

Comments: Where possible, apply water-based emulsions based on easily degradable surfactants. Alternative products are available or under development for all uses.

> Carriers do not need to be used for dyeing in high-pressure machinery.

Categories of carriers also recommended not to be used: Chloronaphthalenes, which are toxic and cause liver damage, chlorobenzenes and chlorotoluenes, which are toxic and can cause liver and kidney damage and irritate eyes and airways.

Legal background: Manufacturers in EU are required to follow the Industry Emissions Directive (IED), 2010/75/EU.

> Prop 65: Several chlorinated solvents are known to the State of California to cause cancer and/or birth defects or other reproductive harm. Safe Harbor Limit: NSRL 3-50 µg/day. No information on settlements.

Use:

Solvent	CAS-RN	Legal framework	Legal requirement
Chloroform 1,1,2-trichloroethane 1,1,2,2-tetrachloroethane 1,1,1,2-tetrachloroethane Pentachloroethane 1,1-dichloroethylene 1,4-dichlorobenzene	67-66-3 79-00-5 79-34-5 630-20-6 76-01-7 75-35-4 106-46-7	Annex XVII of Regulation (EC) No 1907/2006 (REACH).	Shall not be placed on the market, or used as substances, as constituents of other substances or in mixtures in concentrations equal to or greater than 0.1% by weight.
Carbon tetrachloride 1,1,1-trichloroethane	56-23-5 71-55-6	Regulation (EC) No 1005/2009 of the European Parliament and of the Council of 16 September 2009 on substances that deplete the ozone layer.	Shall not be produced, placed on the market, or used.
$\alpha,\alpha,\alpha,4$ -tetrachlorotoluene; p-chlorobenzotrichloride α,α,α -trichlorotoluene; benzotrichloride α -chlorotoluene; benzyl chloride	5216-25-1 98-07-7 100-44-7	Annex XVII of Regulation (EC) No 1907/2006 (REACH).	1 mg/kg ¹
Trichloroethylene	79-01-6	Listed in both annex XIV and in the Candidate List of Substances of Very High Concern for authorization and annex XIV in Regulation (EC) No 1907/2006 (REACH).	0.1% by weight in articles for information duty.
1,2,3-trichloropropane	96-18-4	Candidate List of Substances of Very High Concern for authorization in Regulation (EC) No 1907/2006 (REACH).	0.1% by weight in articles for information duty.

¹ The named solvents have a restriction limit of 1 mg/kg in clothing, related accessories, textiles other than clothing in skin contact, or footwear (CMR fast track) according to Annex XVII of Regulation (EC) No 1907/2006 (REACH), entry 72. The CMR fast track restriction does not apply to clothing, related accessories, textiles other than clothing, or footwear within the scope of Regulation (EU) 2016/425 (PPE).

Test method: No standardised test method for all substances available.

Test equipment: GC-MS, GC-ECD EN 17137 (textile) for chlorotoluenes and chlorobenzenes.

LOQ: 0.5 mg/kg

Solvents - DMFa (N,N-dimethylformamide)



N,N-dimethylformamide (DMFa): 68-12-2

Properties: Toxic to reproduction. It may have a faint amine odour in finished products.

Use:

Used as solvent in textile coating processes and in production of leather imitation as PU, acrylic and aramid. An intermediate for paper finishing.

Comments: Use "water-borne" PU, if possible, which contain less DMFa.

Legal background: Candidate list of Substances of Very High Concern (SVHC) for the authorization of the Regulation (EC) No 1907/2006 (REACH).

Restricted in polyurethane-coated work gloves in Germany. The maximum DMFa content must be less than 10 mg/kg glove material (TRGS 401).

Should not be present in products in concentrations above 500 mg/kg (sum of DFMa, DMAC and NMP).

DMFa have a restriction limit of 3000 mg/kg in clothing, related accessories, textiles other than clothing in skin contact, or footwear (CMR fast track) according to Annex XVII of Regulation (EC) No 1907/2006 (REACH), entry 72. The CMR fast track restriction does not apply to clothing, related accessories, textiles other than clothing, or footwear within the scope of Regulation (EU) 2016/425 (PPE).

Prop 65: DMFa is known to the State of California to cause cancer. Safe Harbor Limit: None. No information on settlements.

Test method:

EN 16778 (protective gloves)

CEN ISO/TS 16189 (footwear and footwear components)

EN 17131 (textile)

Test equipment: GC-MS

LOQ: 10 mg/kg

Solvents - DMAC (N,N-dimethylacetamide)



Required limit value: Should not be present in products in concentrations above 500 mg/kg (sum of DFMa, DMAC and NMP).

CAS RN: N,N-dimethylacetamide (DMAC): 127-19-5

Properties: Toxic to reproduction, irritating.

Used as solvent in textile coating processes and in industrial coa-Use:

tings, polyimide films, paint strippers and ink removers.

Comments: Use "water-borne" systems if possible.

Candidate list of Substances of Very High Concern (SVHC) for the Legal background: authorization of the Regulation (EC) No 1907/2006 (REACH).

> DMAC have a restriction limit of 3000 mg/kg in clothing, related accessories, textiles other than clothing in skin contact, or footwear (CMR fast track) according to Annex XVII of Regulation (EC) No 1907/2006 (REACH), entry 72. The CMR fast track restriction does not apply to clothing, related accessories, textiles other than clothing, or footwear within the scope of Regulation (EU) 2016/425 (PPE).

Prop 65: DMAC is known to the State of California to cause birth defects or other reproductive harm. Safe Harbor Limit: None. No information on settlements.

Test method: No standardised quantitative test method available for textiles. Test equipment: GC-MS, LC-MS

> (EN 17131 can be used as reference for in-house methods though it only applies to DMFa)

LOQ: 10 mg/kg

Solvents - NMP (N-methyl-2-pyrrolidone)



Comments:

Legal background:

Troperties: Toxic to reproduction, irritating.

Use:

Good solvency properties for polymers. Used as solvent in textile coating processes and in production of leather imitation (PU).

Surface treatment of textiles, resins and metal coated plastics or as a paint stripper. Intermediates for textile auxiliaries, plasticizers,

stabilizers and specialty inks.

Polyamide precursor. SBR (styrene-butadiene) latex production.

Should not be present in products in concentrations above 500 mg/kg (sum of DFMa, DMAC and NMP).

N-methyl-2-pyrrolidone (NMP): 872-50-4

Use "water-borne" systems if possible. Note that NEP (1-ethylpyrrolidin-2-one), CAS 2687-91-4 is not a suitable alternative to NMP since it is Reproduction Toxic 1B (a CMR substance) and ongoing regulation of a limit value for working environment.

Candidate list of Substances of Very High Concern (SVHC) for the authorization of the Regulation (EC) No 1907/2006 (REACH).

NMP have a restriction limit of 3000 mg/kg in clothing, related accessories, textiles other than clothing in skin contact, or footwear (CMR fast track) according to Annex XVII of Regulation (EC) No 1907/2006 (REACH), entry 72. The CMR fast track restriction does not apply to clothing, related accessories, textiles other than clothing, or footwear within the scope of Regulation (EU) 2016/425 (PPE). NMP has also a limit value for working environment under Annex XVII of Regulation (EC) No 1907/2006 (REACH), entry 71.

Prop 65: NMP is known to the State of California to cause birth defects or other reproductive harm. Safe Harbor Limit: MADL 3200 μ g/day (inhalation), 17000 μ g/day (dermal). No information on settlements.

Test method: EN ISO 19070 (leather)

No standardised quantitative test method available for textiles. (EN 17131 can be used as reference for in-house methods though it only applies to DMFa)

Test equipment: GC-MS, LC-MS

LOQ: 25 mg/kg

CHEMICALS GUIDANCE | Edition: August 2021 | © 2021 Textilimportörerna/Swedish Chemicals Group - RISE IVF

Tin organic compounds (Organostannic compounds)



Required limit value: Should not be present in products.

CAS RN: Various

Properties: Tributyltin, dibutyltin and dioctyltin compounds are different chemical substances that are toxic and dangerous for the

environment. Bioaccumulative and persistent.

Use:

Dibutyltin compounds (DBT) and dioctyltin compounds (DOT) are used in consumer products as stabilizers (mainly PVC) or catalysts (PU and PVC). Organotin catalysts are used in a wide variety of polyurethane applications, aiding formation of the urethane bond

and generally functioning as Lewis acid catalysts.

Comments:

Alternative stabilizers are barium/zinc, potassium/zinc, calcium, calcium/zinc organic or methyltin stabilisers.

Alternative catalysts can be zirconate compounds (e.g. titanium 2-ethylhexanoate) or amines such as bis- (dimethyl-aminoethyl) ether (BDMAEE) and triethylenediamine (TEDA) along with organometallic compounds such as potassium acetate.

Dialkyl tin compounds represents a large family of substances that consist of the following common constituents, see list of DBTs in Annex 4.

Trialkyltin compounds are biocides, see also the section regarding Biocidal agent.

Legal background: Legal Limit: 0.1% by weight

Dioctyltin (DOT), dibutyltin (DBT) compounds and tri-substituted organostannic compounds such as tributyltin (TBT) shall not be used in articles. Annex XVII of the Regulation (EC) No 1907/2006 (REACH), entry 20.

Tributyltin oxide (TBTO), 56-35-9, Dibutyltin dichloride (DBTC), 683-18-1, 2-ethylhexyl 10-ethyl-4,4-dioctyl-7-oxo-8-oxa-3,5-dithia-4-stannatetradecanoate (DOTE), 15571-58-1 and reaction mass of DOTE and MOTE ², Dibutylbis(pentane-2,4-dionato-O,O')tin, 22673-19-4 and Dioctyltin dilaurate, stannane, dioctyl-, bis(coco acyloxy) derivs., and any other stannane, dioctyl-, bis(fatty acyloxy) derivs. wherein C12 is the predominant carbon number of the fatty acyloxy moiety are listed on the Candidate List of Substances of Very High Concern for authorization of the Regulation (EC) No 1907/2006 (REACH).

Test method:

EN ISO 22744-1, -2 (textile)

CEN ISO/TS 16179 (footwear).

Test equipment: GC-MS. LOQ: 0.2 mg/kg

² reaction mass of 2-ethylhexyl 10-ethyl-4,4-dioctyl-7-oxo-8-oxa-3,5-dithia-4-stannatetradecanoate and 2-ethylhexyl 10-ethyl-4-[[2-[(2-ethylhexyl)oxy]-2-oxoethyl]thio]-4-octyl-7-oxo-8-oxa-3,5-dithia-4-stannatetradecanoate

PRODUCT-RELATED (PROPERTY-LENDING) CHEMICALS

Allergenic dyes



21 dyes are listed in Appendix 1

Required limit value:	Should not be present in products.	
CAS RN:	Various	
Properties:	Highly allergenic (strong sensitizers). They may also have other hazardous properties.	
Use:	Dyeing of textile and leather imitation goods.	
Comments:	Use other feasible dyes that are not hazard classified as skin sensitizers (skin allergens).	
Legal background:	Legal limit: 0.1% by weight for Navy Blue, EC# 405-665-4 in chemical preparations used for colouring textile and leather articles in Annex XVII (entry 43) of Regulation (EC) No 1907/2006 of the European Parliament and of the Council (REACH).	
	Eight disperse dyestuffs are banned in Germany, see Appendix 1.	
Test method:	EN ISO 16373 (extractable dyestuffs). DIN 54231 for textiles (qualitative and not recommended).	
	LOQ: 50 mg/kg	

Banned arylamines related to azo dyes





Legal background:





Substances are listed in Appendix 2

Required limit value:	Azo dyes that are degradable to carcinogenic arylamines should
	not be present in products.
CAS RN:	Various

Properties:

Carcinogenic. Some are allergenic. Arylamines can form part of the molecular structure of a dye. Certain azo dyes can form the listed banned arylamines.

Use: Constituent of dyes. Dyeing and printing.

Comments:

Dyes that can release one of the banned aromatic amines may not be used. See Appendix 2 for a description of banned arylamines.

Legal limit in textile and leather articles: 0.003% by weight (30 mg/kg) per each of the arylamine breakdown products in the dyed parts of the article, which may come into direct and prolonged contact with the human skin or oral cavity.

Annex XVII of Regulation (EC) No 1907/2006 (REACH), entry 43.

4-chloro-o-toluidinium chloride, 2-Naphthylammoniumacetate, 4-methoxy-m-phenylene diammonium sulphate, 2,4-diaminoanisole sulphate and 2,4,5-trimethylaniline hydrochloride have a restriction limit of 30 mg/kg in clothing, related accessories, textiles other than clothing in skin contact, or footwear (CMR fast track) according to Annex XVII of Regulation (EC) No 1907/2006 (REACH), entry 72. The CMR fast track restriction does not apply to clothing, related accessories, textiles other than clothing, or footwear within the scope of Regulation (EU) 2016/425 (PPE).

Several arylamines are listed on the Candidate List of Substances of Very High Concern for authorization of the Regulation (EC) No 1907/2006 (REACH).

Prop 65: Several arylamines are known to the State of California to cause cancer. Safe Harbor Limit: NSRL 0.001-110 μ g/day. No information on settlements.

Test method:

EN ISO 14362-1, -3 (textile)

EN ISO 17234-1, -2 (leather)

(methods specified in REACH Annex XVII, Appendix 10)

LOQ: 20 mg/kg (per each of the arylamine breakdown products).

Benzotriazols (UV-320, UV-327, UV-328 and UV-350)



Required limit value: Should not be present in products.

CAS RN: 2-benzotriazol-2-yl-4,6-di-tert-butylphenol (UV-320); 3846-71-7

2,4-di-tert-butyl-6-(5-chlorobenzotriazol-2-yl)phenol

(UV-327); 3864-99-1

2-(2H-benzotriazol-2-yl)-4,6-ditertpentylphenol (UV-328); 25973-55-1

2-(2H-benzotriazol-2-yl)-4-(tert-butyl)-6-(sec-butyl)phenol

(UV-350); 36437-37-3

Properties: Persistent, Bioaccumulative and Toxic.

Very Persistent and very Bioaccumulative.

Use: UV-stabilizer for plastics, polyurethanes and rubber and constituent

in formulations used for coating of surfaces, e.g. cars or special industrial wood coatings. Also used in dishwasher detergents, dry

cleaning equipment, and de-icing/anti-icing fluids.

Legal background: UV-320, UV-327, UV-328 and UV-350 are listed in the Candidate

List of Substances of Very High Concern for authorization of the

Regulation (EC) No 1907/2006 (REACH).

Test method: No standardised test method available.

Test equipment: GC-MS, LC-MS, GC-ECD

LOQ: 50 mg/kg

3-benzylidene camphor; 3-BC (1,7,7-trimethyl-3-(phenylmethylene)bicyclo[2.2.1] heptan-2-one)



Required limit value: Should not be present in products.

CAS RN: 15087-24-8

Properties: Endocrine disrupting properties.

Use: UV-stabilizer for cosmetics, but possibly also for polymeric mate-

rials such as plastics, polyurethanes and rubber.

Legal background: 1,7,7-trimethyl-3-(phenylmethylene)bicyclo[2.2.1]heptan-2-one

(3-BC) is listed on the Candidate List of Substances of Very High Concern for authorization of the Regulation (EC) No 1907/2006

(REACH).

Test method: No standardised test method available.

Test equipment: LC-MS, GC-MS

LOQ: 100 mg/kg

Cadmium (Cd) and cadmium salts



Required limit value: Should not be present in products.

CAS RN: Cadmium (metal): 7440-43-9

Properties: Heavy metal that occurs naturally in small quantities in nature.

Toxic to aquatic organisms. Non-biodegradable. Dangerous for

the environment. Can cause kidney damage.

Use in textile and leather: Can occur in pigmented plastisol(rubber prints.

Use in accessoriesSurface treatment. Pigment in colouring agent. Also in plastics asand packaging:stabilizers and pigment. Cadmium-based stabilizers to increasethe endurance of the material. For recycled packaging cadmium

may have had a different original use.

Comments: Alternatives are available, such as calcium-zinc based stabilizers.

Order cadmium-free processes and materials.

Occurrence in materials below 0.5 mg/kg is generally regarded as $\,$

contaminations which cannot be controlled.

Legal background:

Legal limit: 0.01% by weight (100 mg/kg) in articles produced from plastic material and in the paint of painted articles. Shall not be used in brazing fillers or in jewellery. Annex XVII of Regulation (EC) No 1907/2006 (REACH), entry 23.

Cadmium, Cadmium oxide (1306-19-0), Cadmium sulphide (1306-23-6), Cadmium chloride (10108-64-2), Cadmium fluoride (7790-79-6), Cadmium sulphate (10124-36-4, 31119-53-6), Cadmium nitrate (10325-94-7), Cadmium carbonate (513-78-0) and Cadmium hydroxide (21041-95-2) are listed on the Candidate List of Substances of Very High Concern for authorization of the Regulation (EC) No 1907/2006 (REACH).

The sum of concentration levels of lead, cadmium, mercury and hexavalent chromium present in packaging or packaging components shall not exceed 100 ppm by weight.

Directive (EC) No 94/62/EC of 20 December 1994 on packaging and packaging waste.

Cadmium and its compounds have a restriction limit of 1 mg/kg (extractable content) in clothing, related accessories, textiles other than clothing in skin contact, or footwear (CMR fast track) according to Annex XVII of Regulation (EC) No 1907/2006 (REACH), entry 72. The CMR fast track restriction does not apply to clothing, related accessories, textiles other than clothing, or footwear within the scope of Regulation (EU) 2016/425 (PPE).

Prop 65: Cadmium and cadmium compounds are known to the State of California to cause cancer and birth defects or other reproductive harm Safe Harbor Limit: MADL cadmium 4.1 µg/day (oral). None for cancer effects. No information on settlements.

Cadmium is restricted in Denmark. Danish legal limits: 75 mg/kg. (Bekendgørelse nr. 858 af 5. September 2009 om forbud mod import salg og fremstilling af cadmiumholdige varer).

Test method:

EN 16711-1 (total content in textiles).
EN 16711-2 (extractable content in textiles).
(Coated fabrics and garment components (e.g. buttons, zips, etc.) can also be tested by the methods above.)

EN ISO 17072-1 (extractable content in leather). EN ISO 17072-2 (total content in leather).

LOQ: 10 mg/kg (total content), (0.1 mg/kg (extractable content).

Test equipment: XRF screening for metal cadmium. LOQ: 50 mg/kg

CMR, Carcinogenic, Mutagenic, Reproductive toxic dyestuffs



15 substances are listed in Appendix 3

Required limit value:	Should not be present in products.		
CAS RN:	Various		
Properties:	Carcinogenic, mutagenic or reproductive toxic. Characteristics: Dyestuffs that are classified as carcinogens, mutagenic, reproductive toxic according to CLP not including class 2 (only cat. 1A and 1B are CMR).		
Use:	Dyeing of textile and leather goods.		
Comments:	Alternatives: Use other dyestuff than the substances in Appendix 3.		
Legal background:	C.I. Solvent Blue 4, C.I. Basic Blue 26, C.I. Basic Violet 3, Michler's base (101-61-1), 4,4'-bis(dimethylamino)-4"-(methylamino)trityl alcohol (561-41-1), C.I. Direct Black 38 (1937-37-7) and C.I. Direct Red 28 (573-58-0) are listed on the Candidate List of Substances of Very High Concern for authorization of the Regulation (EC) No 1907/2006 of the European Parliament and of the Council (REACH). Restrictions for use of substances, harmonised classified as carcinogens, mutagenic, reproductive toxic according to CLP including class 2 (only 1A and 1B are CMR), as substances, as constituents of other substances or in mixtures. These are found in REACH annex XVII, entry 28-30.		
	C.I. Disperse Blue 1, C.I. Basic Red 9 and C.I. Basic Violet 3 with ≥ 0,1 % of Michler's ketone have a restriction limit of 50 mg/kg in clothing, related accessories, textiles other than clothing in skin contact, or footwear (CMR fast track) according to Annex XVII of Regulation (EC) No 1907/2006 (REACH), entry 72. The CMR fast track restriction does not apply to clothing, related accessories, textiles other than clothing, or footwear within the scope of Regulation (EU) 2016/425 (PPE).		
	Prop 65: Several dyestuffs are known to the State of California to cause cancer. Safe Harbor Limit: NSRL 0.09-300 $\mu g/day$. No information on settlements.		
Test method:	EN ISO 16373 (extractable dyestuffs)		
	LOQ: 50 mg/kg		

Chromium VI









Required limit value:

Should not be present in products.

CAS RN:

Chromium VI (Cr+6, hexavalent chromium): 18540-29-9

Properties:

Dangerous for the environment. Carcinogenic. Allergenic. Toxic.

Use:

Metal plated metal parts. Chromic acid is used as wood preservative. Some dyes may contain chromium.

Oxidation agent. Fixing chemical. Used for finishing of direct dyes to improve their wash fastness. Potassium dichromate is used for oxidation of vat and sulphur dyes. Chromium salts are used for preparation and finishing of acid dyes on silk and wool.

Tanning leather with basic chromium III salts is the most widely used method where chromium VI may occur as an impurity. Etching of artificial leather and rubber.

Comments:

Chromium III is an alternative in surface treatment of metal but only for decorative metal plating and not hard metal plating. Other metals such as tin and zinc may be used for metal plating instead of chromium VI.

Chromium III is an alternative as fixing agent in mordant dyeing.

Use acid dyes with high colourfastness to avoid use of chromium salts for dyeing of polyamide, silk, wool and leather. Use hydrogen peroxide and other per-salts to avoid the use of chromium VI-based salts.

In leather tanning chromium III is used, but can oxidize to chromium VI under uncontrolled conditions. Vegetable tanning agents are alternatives for leather if these tanning agents are formaldehyde free. Tanning with titanium is an emerging technology.

Common chromium VI substances are listed in Appendix 5.

Legal background:

Legal limit: 0.0003% by weight (3 mg/kg) for leather in direct skin contact. Annex XVII of Regulation (EC) No 1907/2006 (REACH), entry 47.

Chromium (VI) compounds listed on the Candidate list of Substances of Very High Concern (SVHC) for the authorization of the Regulation (EC) No 1907/2006 (REACH) are listed in Appendix 5. Several Chromium compounds are also included in REACH Annex XIV.

Chromium VI compounds have a restriction limit of 1 mg/kg (extractable chromium VI content) in clothing, related accessories, textiles other than clothing in skin contact, or footwear (CMR fast track) according to Annex XVII of Regulation (EC) No 1907/2006 (REACH), entry 72. The CMR fast track restriction does not apply to clothing, related accessories, textiles other than clothing, or footwear within the scope of Regulation (EU) 2016/425 (PPE).

The sum of concentration levels of lead, cadmium, mercury and chromium VI present in packaging or packaging components shall not exceed 100 ppm by weight.

Directive (EC) No 94/62/EC of 20 December 1994 on packaging and packaging waste.

Prop 65: Chromium VI is known to the State of California to cause cancer and birth defects or other reproductive harm. Safe Harbor Limit: NSRL 0.001 μ g/day (inhalation), MADL 8.2 μ g/day (oral). No information on settlements.

Test method:

ISO 17075 (leather).

No standardised test method available for textiles. Test equipment: UV-VIS Spectrometer.

LOQ: 0.5 mg/kg

Test equipment: XRF screening for metal chromium

LOQ: 50 mg/kg

Flame retardants/Biocides - Boric acid, borate compounds



Required limit value: Should not be present in products. CAS RN: Boric acid; 10043-35-3 and 11113-50-1 Disodium tetraborate anhydrous; 1303-96-4, 12179-04-3 and 1330-43-4 Tetraboron disodium heptaoxid, hydrate; 12267-73-1 Sodium perborate; perboric acid, sodium salt, 234-390-0 Sodium peroxometaborate, 7632-04-04 Disodium octaborate, 12008-41-2 Orthoboric acid, sodium salt, e.g. 13840-56-7 Properties: Toxic to reproduction. Wood veneers/pressed wooden panels and boards. Boric acid Use: and other boron compounds may be used as flame retardant in cellulosic materials, mainly wood, and biocidal agent in boards. Borate compounds may be used as bleaching agents in chemical preparations. Legal limit: Boric acid, Disodium tetraborate anhydrous, Disodium octaborate, Tetraboron disodium heptaoxid, hydrate, Sodium perborate; Perboric acid, sodium salt, Sodium peroxometaborate and Orthoboric acid, sodium salt are listed on the Candidate List of Substances of Very High Concern for authorization of the Regulation (EC) No 1907/2006 (REACH). Test equipment: AAS, ICP-MS and ICP-OES. Test method:

LOQ: 25 mg/kg for individual compounds (10 mg/kg for total Boron content).

Flame retardants/Plasticizer - Chloroparaffins



Required limit value:	Should not be present in products.
Reduired IIIIII value:	Should not be present in products.

CAS RN: Short-chain chloroparaffins (C10-C13, SCCP): e.g. 85535-84-8

Medium-chain chloroparaffins (C14-C17, MCCP): e.g. 85535-85-

9, 198840-65-2, 1372804-76-6.

Long-chain chloroparaffins (C18-, LCCP): 85535-86-0

Persistent, bioaccumulative and toxic. Dangerous for the environ-

ment. Carcinogenic. Allergenic. Toxic.

Use in textile: Plasticizers and flame retardant in plastic material. Plasticizers in

coatings and synthetic leather.

Use in leather: Fat liquoring agent in leather production.

Use in accessories and packaging:

Plasticizers and flame retardant in plastic material and rubber.

Comments:

Alternative plasticizers and flame retardants are available but must be evaluated. Halogen-free alternatives include phosphorus- and

nitrogen-based organic chemical flame retardants and non-chemi-

cal barrier technologies.

Legal background: Legal limit: Shall not occur.

Short-chain chloroparaffins are listed as POP in the Stockholm Convention on Persistent Organic Pollutants (POPs) and banned in EU by Regulation (EU) No 2019/1021. Residues below 0.15 % SCCP by weight in articles are allowed to be placed on the market and used, as this is the amount of SCCP that may be present as an impurity in an article produced with MCCP.

Short-chain chloroparaffins (C10-C13) and Medium-chain chloroparaffins (C14-C17) are listed on the Candidate list of Substances

of Very High Concern (SVHC) for the authorization of the Regulation

(EC) No 1907/2006 (REACH).

Prop 65: Chloroparaffins are known to the State of California to cause cancer. Safe Harbor Limit: NSRL 8 μg /day. No information on settle-

ments.

Test method: EN ISO 22818 (textiles). ISO 18219-1,-2 (leather).

LOQ: 100 mg/kg (textiles)

³ Persistent Organic Pollutants (POPs) are organic chemical substances, which remain intact for exceptionally long periods of time, become widely distributed in the environment, accumulate in the fatty tissue of living organisms and are toxic to both humans and wildlife.

Flame retardants - Dechlorane™ Plus

(1,6,7,8,9,14,15,16,17,17,18,18 Dodecachloropentacyclo[12.2.1.16,9.02,13.05,10] octadeca-7,15-diene)



Required limit value: Should not be present in products.

CAS RN: 13560-89-9; 135821-74-8; 135821-03-3

Properties: Persistent and bioaccumulative.

Use: Flame retardant for plastics. Use in adhesives and sealants.

Use in binding agents.

Legal background: Dechlorane™ Plus is listed in the Candidate List of Substances

of Very High Concern for authorization of Regulation (EC) No

1907/2006 (REACH).

Test method: No standardised test method available.

Test equipment: GC-MS, LC-MS, GC-ECD,

(XRF to detect chlorine).

LOQ: 100 mg/kg

Flame retardants - Hexabromocyclododecan (HBCDD)





Required limit value:	Should not be present in products.
CAS RN:	Hexabromocyclododecane (HBCD, HBCDD): 25637-99-4, 3194-55-6, 134237-50-6,134237-51-7 and 134237-52-8
Properties:	Persistent, bioaccumulative and toxic. Halogenated organic additives in polymers may leach out and have a negative impact on health and environment.
	Halogen containing polymers may form highly corrosive substances and an undefined range of halogenated substances that may be PBT or CMR when incinerated.
Use:	Flame retardant treatment of products, (i.e upholstery and interior textiles), where fire protection is required. Also used in packaging flakes made of polystyrene (PS).
Comments:	Alternative plasticizers and flame retardants are available but must be evaluated. Halogen-free alternatives include phosphorus- and nitrogen-based flame retardants and non-chemical barrier technologies such as blends of natural and synthetic fibres used in furniture and mattresses and high performance synthetic materials used in firefighter uniforms and other protective clothing.
	Textile goods for private use are basically never flame-retardant-treated. The only case when textile goods are treated with flame retardant is if the end customer orders this property. Usually it is done to satisfy regulatory requirements of fire protection.
Legal background:	Legal limit: Shall not occur.
	Hexabromocyclododecane is listed as POP in the Stockholm Convention on Persistent Organic Pollutants (POPs) and is banned in EU by Regulation (EU) No 2019/1021. Residues below 100 ppm by weight are allowed in articles, as this amount may be present as an impurity.
	Hexabromocyclododecane (HBCDD) and all major isomers are listed in both annex XIV and in the Candidate List of Substances of Very High Concern for authorization of Regulation (EC) No 1907/2006 (REACH).
Test method:	EN ISO 17881-1 (textiles).
	Test equipment: GC-MS, LC-MS, GC-ECD LOQ: 20 mg/kg

Flame retardants - Polybrominated biphenyls (PBB) and Polybrominated diphenyl ethers (PBDE)









Required limit value:

Should not be present in products.

CAS RN:

Polybrominated biphenyls: 59536-65-1 (mix) Hexabromobiphenyl: 36355-01-8

Tetrabromodiphenyl ether (TetraBDE): 5436-43-1 Pentabromodiphenyl ether (PentaBDE): 32534-81-9, 60348-60-9

Hexabromodiphenyl ether (HexaBDE): 68631-49-2, 207122-15-4 Heptabromodiphenyl ether (HeptaBDE): 207122-16-5, 446255-22-

Octabromodiphenyl ether (OctaBDE): 32536-52-0 Decabromodiphenyl ether (DecaBDE): 1163-19-5

Properties:

Persistant, bioaccumulative and toxic. Halogenated organic additives in polymers may leach out and have a negative impact on health and environment.

Halogen containing polymers may form highly corrosive substances and undefined range of halogenated substances that may be PBT or CMR when incinerated.

Use:

Flame-retardant treatment of products where fire protection is required.

Comments:

Alternative plasticizers and flame retardants are available but must be evaluated. Halogen-free alternatives include phosphorus- and nitrogen-based flame retardants and non-chemical barrier technologies such as blends of natural and synthetic fibers used in furniture and mattresses and high performance synthetic materials used in firefighter uniforms and other protective clothing.

Textile goods for private use are basically never flame-retardant-treated. The only case when textile goods are treated with flame retardant is if the end customer orders this property. Usually it is done to satisfy regulatory requirements of fire protection.

Legal background:

Legal limit: Shall not occur.

TetraBDE, PentaBDE, HexaBDE, HeptaBDE, DecaBDE and Hexabromobiphenyl are listed as POP in the Stockholm Convention on Persistent Organic Pollutants (POPs) and are banned in EU by the POPs regulation (EU) No 2019/1021. Residues of TetraBDE, PentaBDE, HexaBDE, HeptaBDE, DecaBDE in mixtures and articles are considered as impurities if the sum of them is below 500 ppm. In substances, residues below 10 mg/kg by weight of each brominated diphenylether is considered as impurities. Hexabromobiphenyl is banned in detectable content.

OctaBDE, and polybrominated biphenyls (PBBs), are restricted in Entry 45 and Entry 8 of Annex XVII to Regulation (EC) No 1907/2006 (REACH).

- -The legal limit for PBBs in textile articles with skin contact is detection limit.
- -The legal limit for OctaBDE in articles or in flame-retardant parts of articles is 0.1 % by weight.

DecaBDE is listed on the Candidate List of Substances of Very High Concern for authorization of the Regulation (EC) No 1907/2006 of the European Parliament and of the Council (REACH).

PBBs are listed in the Rotterdam Convention.

Prop 65: Pentabromodiphenyl ether mixture [DE-71 (technical grade)] is known to the State of California to cause cancer. Safe Harbor Limit: None. No information on settlements. Polybrominated and polychlorinated biphenyls are known to the State of California to cause cancer and birth defects or other reproductive harm Safe Harbor Limit: NSRL PBB 0.02 $\mu g/day$, PCB 0.09 $\mu g/day$. None for reproductive harm. No information on settlements.

Test method:

EN ISO 17881-1 (textiles) EN 16377 for PBB (plastics)

Test equipment: GC-MS, LC-MS, GC-ECD.

LOQ: 10 mg/kg

Flame retardants - TCEP



Required limit value: Should not be present in products.

CAS RN: Tris(2-chlorethyl)phosphate (TCEP): 115-96-8

Properties:

Persistent, bioaccumulative and toxic. Halogenated organic additives in polymers may leach out and have a negative impact

on health and environment.

Halogen containing polymers may form highly corrosive substances and undefined range of halogenated substances that may be PBT

or CMR when incinerated.

Use: Flame-retardant treatment of products (i.e. coated textiles) where

fire protection is required. Plasticizers.

Comments: Alternative plasticizers and flame retardants are available but must

be evaluated. Halogen-free alternatives include phosphorus- and nitrogen-based flame retardants and non-chemical barrier technologies such as blends of natural and synthetic fibres used in furniture and mattresses and high per-formance synthetic materials used in fire-

fighter uniforms and other protective clothing.

Textile goods for private use are basically never flame-retardant-treated. The only case when textile goods are treated with flame retardant is if the end customer orders this property. Usually it is

done to satisfy regulatory requirements of fire protection.

Legal background:

Tris(2-chlorethyl) phosphate (TCEP) is listed in the Candidate List of Substances of Very High Concern for authorization of the Regulation (EC)

No 1907/2006 of the European Parliament and of the Council (REACH).

Prop 65: TCEP is known to the State of California to cause cancer. Safe Harbor Limit: None. Settlements agreed at 25 ppm

TCEP for PVC rainwear.

Test method: EN ISO 17881-2 (textiles)

Test equipment (for non-textile materials): GC-MS, LC-MS,

GC-ECD

LOQ: 5 mg/kg

Flame retardants - Trisubstituted phosphates





Required limit value: Should not be present in products.

CAS RN: Trixylyl phosphate: 25155-23-1

Phenol, isopropylated, phosphate (3:1), 68937-41-7

Properties: Toxic for reproduction.

Use: Mainly used as functional fluid. Plasticizer of vinylite (a copolymer

of vinyl chloride and vinyl acetate), cellulosic resins and natural

and synthetic rubber.

Plasticizer and flame retardant of PVC and PU.

Legal limit: Trixylyl phosphate: 25155-23-1 and Phenol, isopropylated,

phosphate (3:1), 68937-41-7 are listed in the Candidate List of Substances of Very High Concern for authorization of the Regulation (EC) No 1907/2006 of the European Parliament and

of the Council (REACH).

Test method: EN ISO 17881-2 (textiles)

Test equipment (for non-textile materials): GC-MS, LC-MS,

GC-ECD LOQ: 5 mg/kg

Formaldehyde







Required limit value:

20 mg/kg for textiles and leather goods for children under the age of two.

75 mg/kg for all clothing and related accessories, as well as textiles and leather goods that under normal or reasonably foreseeable conditions of use, come into direct contact with the human skin to an extent similar to clothing.

300 mg/kg for all other textiles and leather goods.

CAS RN:

50-00-0

Properties:

Formaldehyde is a volatile colourless gas that is CMR classified according to Regulation (EC) No 1272/2008 (CLP). Occurs naturally in small quantities in the atmosphere and in nature. Formaldehyde is a human carcinogen that also can cause skin irritation and allergy.

Use:

Shrinkage-resistant treatment. Wrinkle-resistant treatment. Dirt-repellent treatment. Dye fixing agent. Preservative.

Organic cross linkers are used in synthetic tanning of leather ("synthans") and may release formaldehyde.

Comments:

Use products without formaldehyde or with very low concentrations of formaldehyde.

Due to its volatility, formaldehyde is "contagious". If a garment containing formaldehyde is placed on top of a garment without formaldehyde, the latter garment will be "infected".

Fabric samples for testing must be packed in air dense plastic bags (polyethylene, PE, or polypropylene, PP).

Legal background:

Formaldehyde have a restriction limit of 75 mg/kg in clothing, related accessories, textiles other than clothing in skin contact, or footwear⁴ (CMR fast track) according to Annex XVII of Regulation (EC) No 1907/2006 (REACH), entry 72. The CMR fast track restriction does not apply to clothing, related accessories, textiles other than clothing, or footwear within the scope of Regulation (EU) 2016/425 (PPE).

Several national legislations, see Appendix 7. The EU countries' national legislations for textile in skin contact will be redrawn when the CMR fast track enters into force. For other products, they will continue to be valid.

German law (Bedarfsgegenständeverordnung and Chemikalien-Verbotsverordnung); Products with formaldehyde content shall be labelled. Wooden products shall not release formaldehyde. Cleaning and finishing agents shall not contain formaldehyde above 0.2%.

Japanese law 112 requires under detection limit for products for infants (less than 5 absorbance units).

Prop 65: Formaldehyde (gas) is known to the State of California to cause cancer. Safe Harbor Limit: NSRL 40 $\mu g/day$. No information on settlements.

For several national legislations worldwide, see Appendix 7.

Test method:

EN ISO 141 84-1 (textiles) ISO 17226 (leather)

Test method specified in Japan law 112 LOQ: 16 mg/kg

⁴ During a transition period of 3 years, jackets, coats or upholstery will have a restriction limit of 300 mg/kg for formaldehyde.

Lead (Pb) and lead salts



Required limit value:

Should not be present in textiles.

100 mg/kg for lead as a metal in plastic and metallic accessories.

CAS RN:

Lead (metal): 7439-92-1

Properties:

Lead exposure can give rise to a number of negative health effects, including damage to liver, nervous system and foetuses. Lead is mainly accumulated in bone tissue. It has a very long half-life in the human body. Use of lead in plastics has not been deemed to cause any significant environmental or health effects in the short term, but in the long term such use increases lead concentrations in the environment.

Use:

Lead salts are additives in plastics as stabilizers to increase the service of life of the material. May be used as pigment in paint and in coloured plastic material. Metallic surface coating of buttons and accessories. For recycled packaging material lead may have had a different original use. Lead metal can also be used to increase ductility of other metals.

Comments:

Alternative stabilizers are barium/zinc, potassium/zinc, calcium or calcium/zinc organic stabilizers. Alternative catalysts can be organotitanate or zirconate compounds (e.g. titanium 2-ethylhexanoate) or amines such as bis- (dimethylaminoethyl) ether (BDMAEE) and triethylenediamine (TEDA) along with organometallic compounds such as potassium acetate.

Legal background:

Lead and lead salts are listed on the Candidate List of Substances of Very High Concern for authorization of the Regulation (EC) No 1907/2006 (REACH). SVHC lead compounds are listed in Appendix 6.

The sum of concentration levels of lead, cadmium, mercury and hexavalent chromium present in packaging or packaging components shall not exceed 100 ppm by weight

Directive (EC) No 94/62/EC of 20 December 1994 on packaging and packaging waste.

Lead salts are restricted in paint products (no restriction on painted articles) within the EU, entry 16 (lead carbonates) and 17 (lead sulphates). Lead and its compounds are restricted in jewellery articles and hair accessories within EU with a legal limit: 500 mg/kg (0.05%), entry 63. Lead and its compounds are restricted in articles that may be placed in the mouth by children with the legal limit 500 mg/kg (0.05%)⁵, entry 63. Annex XVII of Regulation (EC) No 1907/2006 (REACH).

Lead and its compounds have a restriction limit of 1 mg/kg (extractable content) in clothing, related accessories, textiles other than clothing in skin contact, or footwear (CMR fast track) according to Annex XVII of Regulation (EC) No 1907/2006 (REACH), entry 72. The CMR fast track restriction does not apply to clothing, related accessories, textiles other than clothing, or footwear within the scope of Regulation (EU) 2016/425 (PPE).

Lead is restricted in Denmark. Danish legal limits: 100 mg/kg. (Bekendgørelse nr. 856 af 5. September 2009 om forbud mod import og salg af produkter, der indeholder bly).

Prop 65: Lead and lead compounds are known to the State of California to cause cancer and birth defects or other reproductive harm. Safe Harbor Limit: NRSL lead acetate 23 μ g/day (oral), lead 15 μ g/day (oral), lead phosphate 58 μ g/day (oral), lead subacetate 41 μ g/day (oral), MADL lead 0.5 μ g/day. Settlements agreed at 50, 90 or 100 ppm for various products.

Test method:

EN 16711-1 (total content in textiles)
EN 16711-2 (extractable content in textile)
(Coated fabrics and garment components (e.g. buttons, zips, etc.) can also be tested by the methods above.)

ISO 17072-1 (extractable content in leather) ISO 17072-2 (total content in leather)

LOQ: 10 mg/kg (total content), 0.1 mg/kg (extractable content).

Test equipment: XRF screening for metal lead LOQ: 50 mg/kg

⁵ That limit shall not apply where it can be demonstrated that the rate of lead release from such an article or any such accessible part of an article, whether coated or uncoated, does not exceed 0.05 µg/cm² per hour (equivalent to 0.05 µg/g/h), and, for coated articles, that the coating is sufficient to ensure that this release rate is not exceeded for a period of at least two years of normal or reasonably foreseeable conditions of use of the article.

Mercury







Required limit value:

CAS RN:

Should not be present in products.

Mercury (metal): 7439-97-6

Phenylmercury neodecanoat: 26545-49-3 Phenylmercury octanoate: 13864-38-5 Phenylmercury 2-ethylhexanoate: 13302-00-6

Phenylmercury propionate: 103-27-5 Phenylmercury acetate: 62-38-4

Properties:

Heavy metal that occurs naturally in small quantities in nature. Toxic to aquatic organisms and non-biodegradable. Dangerous for the environment. Can cause kidney damage.

Use:

Phenylmercury compound are used as catalysts in the production of polyurethane coatings, adhesives, sealants and elastomers. For recycled packaging mercury may have had a different original use as e.g. pesticide in woods.

Legal background:

Mercury compounds are restricted in impregnation of heavy-duty industrial textiles and yarn intended for their manufacture in Annex XVII of Regulation (EC) No 1907/2006 (REACH), entry 18. Phenyl mercury compounds are also restricted in entry 62 with a restriction limit of 0.01% = 100 mg/kg.

Article 1 of the European Parliament and Council Regulation (EC) No 1102/2008 of 22 October 2008 ban the exports of metallic mercury and certain mercury compounds and mixtures.

Products containing mercury may not be placed on the Swedish market. Norway prohibits the manufacture, import, export and sale of articles that contain mercury or mercury compounds (0.001% (10 ppm). Denmark prohibits the import, export and sale of articles and part of articles that contain mercury or mercury compounds (0.01% (100 ppm). Mercury is under restriction globally through the Minamata Convention.

The sum of concentration levels of lead, cadmium, mercury and hexavalent chromium present in packaging or packaging components shall not exceed 100 ppm by weight. Directive (EC) No 94/62/EC of 20 December 1994 on packaging and packaging waste. Mercury and its compounds are listed in the Rotterdam convention.

Prop 65: Mercury is known to the State of California to cause birth defects or other reproductive harm. No Safe Harbor Limit. No information on settlements.

Test method:

EN 16711-1 (total content in textiles)
EN 16711-2 (extractable content in textiles)
ISO 17072-1 (extractable content in leather)
ISO 17072-2 (total content in leather)

LOQ: 10 mg/kg (total content), 0.02 mg/kg (extractable content).

Test equipment: XRF screening for metal mercury.

LOQ: 50 mg/kg

Nickel (Ni), in accessories




Required limit value: 0.5 µg per cm² and week for products intended to come into direct and prolonged contact with the skin. 0.2 µg per cm² and week for piercing items. CAS RN: Nickel (metal): 7440-02-0 Nickel is one of the most common substances that cause contact Properties: dermatitis. Highly allergenic (strong sensitizer). Use: Nickel is often used in stainless steel and other alloys used in clothing accessories such as zippers, buttons and rivets. Comments: Refrain from using nickel-treated metals or nickel-containing metal coatings. 0.5 µg per cm² and week for products intended to come into Legal background: direct and prolonged contact with the skin. 0.2 µg per cm² and week for piercing items. Annex XVII of Regulation (EC) No 1907/2006 of the European Parliament and of the Council (REACH, entry 27. Prop 65: Metallic nickel is known to the State of California to cause cancer. Safe Harbor Limit: None. No information on settlements. Test method: Test method I: EN 12472:2005+A1:2009 and EN 1811:2011+A1:2015 (for coated items) EN 1811:2011+A1:2015 (for non-coated item). (CEN methods specified in REACH Annex XVII, entry 27) LOQ: 0.02 µg/cm² /week Test method II (not for testing legal compliance): Screening test

for nickel emission. Swedish pharmacies sell a test kit.

Detection limit II: Qualitative indication only = no occurrence. (This screening method can also give a reading for other metals than Ni.)

PFAS - Highly fluorinated carboxylic acids (PFOA and related substances)



Should not be present in products.

Example: 335-67-1

Highly fluorinated carboxylic acids (PFCAs) such as PFOA are persistent, bioaccumulative and toxic (PBT) substances. Due to their extreme stability these chemicals will not degrade but will accumulate due to their persistency in the environment. PFCAs are water soluble and can contaminate drinking water. As a result of their long-range transport potential and mobility they can be found even in remote regions (e.g. the Artic). PFOA can cause cancer (testicular and kidney cancer), liver damage and changes in immune- and endocrine system (e.g. cholesterol levels). Exposure to PFOA effects the foetus development during pregnancy and has adverse effects on breastfed infants (e.g. low birth weight). Other long chain fluorinated carboxylic acids are also classified as PBT substances. They can be as present as pure substances in products or as precursor chemicals (e.g. polymers) that form PFOA and other PFCAs due to transformation processes

Use:

PFOA-related substances (e.g. side-chain fluorinated polymers) are used in water oil repellent textile finishes as well as impregnation agents in leather. PFOA and other PFCAs are used as an emulsifier in the production of fluoropolymers such as polyte-trafluoroethylene (PTFE) etc

Comments:

Alternatives are technologies based on short chain fluorotelomer chemistry (< C7) and may only be used in applications where oil and stain repellent properties are essential such as protective occupational textiles when no other feasible alternatives are available.

Where oil repellent properties are not essential and just water repellence is required, non-fluorinated chemistries (C0) such as waxes and paraffins but not silicones are recommended.

Legal background:

Legal limit: Shall not occur.

PFOA, its salts and related compounds are listed in the Stockholm Convention on Persistent Organic Pollutants (POPs) and banned in EU by the POPs Regulation (EU) No 2019/1021. Residues below 0.025 mg/kg of each substance, and 1 mg/kg of a combination of PFOA-related substances in substances, mixtures, and articles are allowed to be placed on the market and used, as these are amounts that may be present as impurities. From 4 July 2023 the restriction applies to textiles for the protection of workers from dangerous liquids.

Long chain PFCAs (C8-C14) including their salts (sodium and ammonium) and precursors are listed as a group in the Candidate List of Substances of Very High Concern for authorization of Regulation (EC) No 1907/2006 (REACH). Listed below:

- (C8) Pentadecafluorooctanoic acid (PFOA) and its ammonium salt (APFO), 335-67-1,3825-26-1,
- (C9) Perfluorononan-1-oic-acid (PFNA) and its sodium and ammonium salts, 375-95-1, 21049-39-8, 4149-60-4,
- (C10) Nonadecafluorodecanoic acid (PFDA) and its sodium and ammonium salts, 335-76-2, 3108-42-7, 3830-45-3,
- (C11) Henicosafluoroundecanoic acid (PFUnA), 2058-94-8,
- (C12) Tricosafluorododecanoic acid (PFDoA), 307-55-1,
- (C13) Pentacosafluorotridecanoic acid (PFTrDA), 72629-94-8,
- (C14) Heptacosafluorotetradecanoic acid (PFTA), 376-06-7,

Declaration duty in Sweden to the Swedish Chemicals Agency for PFAS in chemical products that are deliberately added. Composition needs not to be specified but the information duty applies without any concentration limit.

Prop 65: PFOA is known to the State of California to cause birth defects or other reproductive harm. Safe Harbor Limit: None. No information on settlements.


Test method:

No standardised test method available.

Test equipment: LC-MS

LOQ: 10 µg/kg

PFAS - Highly fluorinated sulfonic acids (PFOS and related substances)

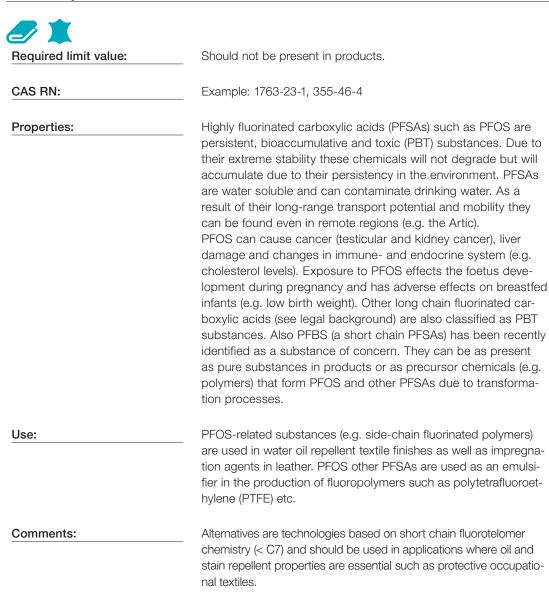

Where oil repellent properties are not essential and just water repellency is required, non-fluorinated chemistries (C0) such as waxes and paraffins but not silicones are requested.

Legal background:

Legal limit: Shall not occur

PFOS and its derivatives are listed in the Stockholm Convention on Persistent Organic Pollutants (POPs) and banned in EU by the POPs Regulation (EU) No 2019/1021. Residues below the following limits are allowed to be placed on the market and used, as these are the amounts that may be present as impurity⁶: 1 μ g/m2 applies to coated textiles and leather products. 0.1% by weight applies to articles or part of articles.

Perfluorobutane sulfonic acid (PFBS) and its salts, Perfluorohexane-1-sulphonic acid and its salts (PFHxS), are listed on the Candidate List of Substances of Very High Concern for authorization of the Regulation (EC) No 1907/2006 (REACH).

Declaration duty in Sweden from 1 January 2019 to the Swedish Chemicals Agency for PFAS in chemical products that are deliberately added. Composition needs not to be specified but the information duty applies without any concentration limit.

Prop 65: PFOS is known to the State of California to cause birth defects or other reproductive harm. Safe Harbor Limit: None. No information on settlements.

Test method:

CEN/TS 15968

Test equipment: LC-MS LOQ: $0.1~\mu g/m^2$

⁶ The total amount of PFOS and PFOS related substances counted as PFOS, see test method CEN/TS 15968:2009.

PFAS - Highly fluorinated ethers



Use:

Test method:



Required limit value: Should not be present in products.

CAS RN: 13252-13-6

Properties: Highly fluorinated ethers (PFPEs) such as HFPO-DA

(2,3,3,3-tetrafluoro-2-(heptafluoropropoxy))propionic acid) were developed as replacements for PFAO and PFOS. They are watersoluble and mobile surfactants that are under suspicion to be equally persistent as other PFASs. While the bioaccumulation potential of HFPO-DA is still uncertain, this substance has showed adverse effects on kidney, immune- and haematological system, as well as effects on foetus development in animal studies. Other PFPEs are likely to be equally stable and mobile.

PFPEs are used as emulsifiers in the production of fluoropolymers such as polytetrafluoroethylene (PTFE) etc.

Comments: Non-fluorinated emulsifiers such as hydrocarbons should be prefer-

red to produce fluoropolymers. Fluorinated emulsifiers may only be

applied for essential uses.

Legal background: HFPO-DA, its salts and its acyl halides (CAS 13252-13-6, 67118-55-2 2062-98-8 and 62037-80-3) are listed in the Candidate List of

55-2, 2062-98-8 and 62037-80-3) are listed in the Candidate List of Substances of Very High Concern for authorization of Regulation (EC) No 1907/2006 of the European Parliament and of the Council (REACH).

Declaration duty in Sweden from 1 January 2019 to the Swedish Chemicals Agency for PFAS in chemical products that are deliberately added. Composition needs not to be specified but the information duty

Prop 65: Highly fluorinated ethers are not listed under Proposition 65.

applies without any concentration limit.

No standardised test method available.

Test equipment: LC-MS

LOQ: -

Phthalate esters



CAS RN: Regulated phthalates are found in Appendix 8.

Properties:

Many phthalates are classified as toxic for reproduction. DIDP is of concern in connection with hepatic toxicity. Many phthalates are suspected endocrine disrupters

the material of interest (e.g. a print).

0.1% by weight (1000 mg/kg) for regulated phthalates (sum of) in

Use: Phthalates may be used as plasticizers in polymers. Additives in adhesives, paints, lacquers, varnishes and solvents.

Alternative plasticizers include citrates, sebacates, adipates, and phosphates etc. The terephthalate, DEHT and the cyclohexane DINCH are example of commercially available alternatives with low human and environmental toxicity. There are also polymers that do not require plasticizers. However, each application needs to be individually assessed for each best specific technical performance.

Legal background:

Annex XVII of Regulation (EC) No 1907/2006 of the European Parliament and of the Council (REACH) addresses the following legal limits:

0.1% by weight of the plasticized material in all articles for the sum of DEHP, DBP, BBP and DIBP, entry 51.

0.1% by weight in toys and childcare articles which can be placed in the mouth for DINP, DIDP and DNOP, entry 52.

DIHP, DMEP, DIPP, DPP and DnHP have a restriction limit of 1000 mg/kg in clothing, related accessories, textiles other than clothing in skin contact, or footwear (CMR fast track) according to Annex XVII of Regulation (EC) No 1907/2006 (REACH), entry 72. This limit applies to each substance individually or in combination with other phthalates that are classifies as CMR substances. The CMR fast track restriction does not apply to clothing, related accessories, textiles other than clothing, or footwear within the scope of Regulation (EU) 2016/425 (PPE).

Phthalate ester substances listed in both Annex XIV and/ or the Candidate List of Substances of Very High Concern for authorization of Regulation (EC) No 1907/2006 (REACH) is found in Appendix 8.

All phthalates in toys and childcare articles for children aged 0-3 years are restricted (0.05%) in Denmark (BEK nr 855).

Prop 65: BBP and DINP are known to the State of California to cause cancer. Safe Harbor Limit: NSRL BBP 1200 μ g/day (oral), DINP 146 μ g/day. DEHP is known to the State of California to cause cancer and birth defects or other reproductive harm. Safe Harbor Limit: NSRL 310 μ g/day (oral). None for reproductive harm. DBP, DnHP and DIDP are known to the State of California to cause birth defects or other reproductive harm. Safe Harbor Limit: MADL DBP 8.7 μ g/day, DnHP 2200 μ g/day (oral), DIDP 2200 μ g/day. Settlements agreed at 1000 ppm for various products for DBP, DEHP, DIDP, DINP and DnHP.

Test method: EN-ISO 14389

Test equipment: GC-MS, LC-MS LOQ: 100 mg/kg

Siloxanes









Required limit value:

1000 mg/kg (0.1% by weight).

CAS RN:

556-67-2 Octamethylcyclotetrasiloxane (D4) 541-02-6 Decamethylcyclopentasiloxane (D5) 540-97-6 Dodecamethylcyclohexasiloxane (D6)

Properties:

Reproduction toxic. Toxic to aquatic life with long lasting effects.

Use:

Used in washing and cleaning products such as softeners, polishes and waxes, cosmetics and personal care products, textile treatment products and dyes, paper and cardboard products. Precursors in the production of polymers such as silicone rubbers.

Legal limit:

D4, D5 and D6 are listed in the Candidate List of Substances of Very High Concern for authorization of the Regulation (EC) No 1907/2006 of the European Parliament and of the Council (REACH).

Test method:

No standardised test methods.

Test equipment: GC-MS. LOQ: 100 mg/kg

BIOCIDAL AGENTS

General information

Biocidal agents are both used as **process chemicals** to prohibit growth of microbes during production and as **product related chemicals** to render biocidal property to the article.

The use of biocidal products in articles should be kept limited, for instance to avoid the increase of resistant bacteria. If the use of biocidal agents is essential, there are biocidal agents approved for PT9 (product type 9, that includes textiles, polymers and leather) according to the Biocidal Product Regulation (EU 528/2012).

Cu-HDO (Bis-(N-cyclohexyldiazeniumdioxy) -copper)





Required limit value:	Should not be present in products.
CAS RN:	312600-89-8
Properties:	Fungicide. Cu-HDO is classified as very toxic to aquatic organisms.
Use:	Fungicide mainly as wood preservatives, but may occur in fungicidal coating of textile-polymeric materials.
Comments:	The alternative to biocidal agents during storage and transport is a cool and dry environment.
	If use of biocidal agents is essential, folpet, chlorocresol. propiconazole, azoxystrobin and fludioxonil are approved for PT9 according to the Biocidal Product Regulation (EU 528/2012).
Legal background:	Cu-HDO is banned within PT9 (product type 9) that includes textiles, polymers and leather, according to the Biocidal Product Regulation (EU 528/2012)
Test method:	No standardised test method available.
	Test equipment: ICP-AES

LOO: FO manufacture

LOQ: 50 mg/kg

Carbendazim





Required limit value: Should not be present in products.

CAS RN: 10605-21-7

Properties: Fungicide. Reproduction toxic, mutagenic and toxic to aquatic life with

long lasting effects and processes.

Use: To counteract fungus growth in clothes, shoes and other leather

items.

Comments: The alternative to biocidal agents during storage and transport

is cool and dry environment. If use of biocidal agents is essential, folpet, chlorocresol, propiconazole, azoxystrobin and fludioxonil are approved for PT9 according to the Biocidal Product

Regulation (EU 528/2012).

Legal background: Carbendazim is banned within PT9 (product type 9) that includes

textiles, polymers and leather, according to the Biocidal Product

Regulation (EU 528/2012).

Test method: No standardised test method available.

Test equipment: GC-MS, LC-MS.

LOQ: -

Dimetylfumarate (DMFu)



Required limit value: Should not be present in products.

CAS RN: 624-49-7

Properties: Fungicide. DMFu is harmful to skin and a strongly allergenic substance.

Use:

To counteract fungus growth in clothes, shoes and other leather items. DMFu can e.g. be found in silica gel bags, but is also applied

on the product both as a powder and in tablet form.

Comments: The alternative to biocidal agents during storage and transport is

cool and dry environment.

If use of biocidal agents is essential, folpet, chlorocresol, propiconazole, azoxystrobin and fludioxonil are approved for PT9

according to the Biocidal Product Regulation (EU 528/2012).

Legal background: Legal limit: 0.00001% by weight (0.1 mg/kg) in articles or any

parts thereof. Annex XVII of Regulation (EC) No 1907/2006

(REACH), entry 61.

Test method: ISO/TS 16186 (footwear)

SS-EN 17130 (textile and textile material)

Test equipment: GC-MS, LC-MS

LOQ: 0.1 mg/kg.

Glutaral





Required limit value: Should not be present in products.

CAS RN: 111-30-8

Properties: Respiratory sensitising properties, skin sensitising and toxic.

Use: Biocide used in leather tanning. Also, a crosslinker for cellulosic

material.

Comments: The alternative to biocidal agents during storage and transport

is cool and dry environment. Make sure that residues levels from

production is kept as low as possible.

Legal background: Glutaral is listed on the Candidate List of Substances of Very High

Concern for authorization of the Regulation (EC) No 1907/2006

(REACH).

Test method: No standardised test method available.

Test equipment: LC-UV, GC-UV

LOQ: -

Guanidine, N,N'''-1,6-hexanediylbis[N'-cyano-, polymer with 1,6-hexanediamine, hydrochloride (PHMB 1600; 1.8)



Required limit value: Should not be present in products.

CAS RN: 27083-27-8, 32289-58-0

Properties: Bactericide. PHMB is very toxic to aquatic life, is suspected of

causing cancer and may cause an allergic skin reaction.

Use: Biocide, bactericide in textiles.

Comments: The alternative to biocidal agents during storage and transport is a

cool and dry environment.

Legal background: PHMB is banned within PT9 (product type 9) that includes

textiles, polymers and leather, according to the Biocidal Product

Regulation (EU 528/2012).

Test method: No standardised test method available.

Test equipment: LC-MS

LOQ: -

Parabenes



Required limit value: Should not be used in processes or present in products.

CAS RN: Various, including:

Butyl 4-hydroxybenzoate (Butylparaben), 94-26-8

Properties: Toxic for reproduction.

Use: Bactericide. Used in cosmetic products and detergents.

Comments: The alternative to biocidal agents during storage and transport is a

cool and dry environment.

Legal background: Butyl 4-hydroxybenzoate (Butylparaben) is listed on the Candidate

List of Substances of Very High Concern for authorization of the

Regulation (EC) No 1907/2006 (REACH).

Butyl 4-hydroxybenzoate (Butylparaben) is an allowed preserva-

tive under the Regulation (EC) No 1223/2009 (cosmetic products).

Test method: No standardised test method available for textiles or leather.

Test equipment: GC-MS, LC-MS.

LOQ: 100 mg/kg

Pentachlorophenol (PCP) and all isomers of Tetrachlorphenols (TeCP)





Legal background:

Required limit value: Should not be present in products.

CAS RN:87-86-5 (PCP), 131-52-2 (PCP sodium salt), TeCP; 935-95-5, 4901-51-3, 58-90-2 (isomers of TeCP)

Properties: Fungicide. Organic compounds. Toxic and dangerous for the environment. On combustion, PCP emits dioxins, which are extre-

mely toxic to humans.

Use: Fungicide for preservative treatment of goods prior to storage and transport

transport.

Preservative in sizing agents and adhesives. Component in printing

pastes (thickener).

Comments: The alternative to biocidal agents during storage and transport is

cool and dry environment.

If use of biocidal agents is essential, folpet, chlorocresol, propiconazole, azoxystrobin and fludioxonil are approved for PT9

according to the Biocidal Product Regulation (EU 528/2012).

Legal limit: PCP and its salts and esters shall not occur. Pentachlorophenol and its salts and esters are listed in the Stockholm Convention on Persistent Organic Pollutants (POPs) and banned in EU by the POPs Regulation (EU) No 2019/1021. Residues below 5 mg/kg in substances, mixtures, and articles are allowed to be placed on the market and used, as this is the amount that may be present as an impurity in an article. Pentachlorophenol (and its salts and esters) is banned in Norway in textiles and leather. Legal limit 5 ppm, (FOR-2004-06-01-922).

Pentachlorophenol is listed in the Rotterdam convention.

Prop 65: PCP is known to the State of California to cause cancer. Safe Harbor Limit: NRSL 40 $\mu g/day$. No information on settle-

ments.

Test method: ISO 17070 (leather)

XP G 08-015 (French standard method for PCP in textiles).

LOQ: 0.1 mg/kg

CEN/TR 14823 (wood). Detection limit 25 mg/kg

EN ISO 15320 (Pulp, paper and board)

Permethrin



Required limit value: Should not be present in products.

CAS RN: 52645-53-1

Properties: Insecticide. Permethrin is like all synthetic pyrethroids a neurotoxin.

It is considered more acutely toxic to children than to adults.

Use: Permethrin is a biocide in textiles. It is also used for home pest

control, forestry, and in public health programs, including head

lice control.

Comments: The alternative to biocidal agents during storage and transport is

cool and dry environment.

Legal background: Permethrin is on the list of temporarily permitted existing biocides

within PT9 (product type 9) that includes textiles, polymers and leather, according to the Biocidal Product Regulation

(EU 528/2012).

Test method: No standardised test method available.

Test equipment: GC-MS, LC-MS.

LOQ: 5 mg/kg

Silver and its compounds



Required limit value: Should not be present in products.

CAS RN: Silver (metal): 7440-22-4

Properties: Bactericide. Slight skin and eye irritant. Disturb denitrification processes in nature that is vital for provision of nutrients to plants.

Dissolved (free) silver ions are very toxic to aquatic organisms.

Use: Silver nano particle complexes are antibiotic additives in plastics

and fibres.

Comments: The alternative to antibacterial agents during use is satisfactory

washing.

Legal limit: No legal limits for silver compounds exist in textiles

and leather.

Some silver compounds are on the list of temporarily permitted existing biocides within PT9 (product type 9) that includes textiles, polymers and leather, according to the Biocidal Product

Regulation (EU 528/2012).

Silver as such is not allowed as a biocidal active substance.

Test method: No standardised test method available.

Test equipment: ICP-MS, ICP-OES or AAS.

LOQ: 10 mg/kg

Trisubstituted tin organic compounds



Required limit value: Should not be present in products.

CAS RN: Tributyltin chloride:1461-22-9

Tributyltin fluoride: 1983-10-4
Tributyltin methacrylate: 2155-70-6
Tributyltin benzoate: 4342-36-3
Tributyltin linoleate: 24124-25-2
Tributyltin naphthenate: 85409-17-2

Properties: Bactericides. Tributyltin compounds are different chemical

substances that are toxic and dangerous for the environment.

Bioaccumulative and persistent.

<u>Use in textile and leather:</u> Antibacterial agent to counteract noxious odours in clothes and

shoes. Preservative, fungicide and antifouling agent.

Comments: The alternative to antibacterial agents during use is satisfactory

washing.

If use of biocidal agents is essential, folpet, chlorocresol, propiconazole, azoxystrobin and fludioxonil are approved for PT9

according to the Biocidal Product Regulation (EU 528/2012).

Legal background: Legal Limit: 0.1% by weight.

All tri-substituted organostannic compounds such as tributyltin (TBT) are restricted in articles in annex XVII of the Regulation (EC) $\,$

No 1907/2006 (REACH), entry 20.

The seven TBT compounds listed above are also included in the

Rotterdam convention.

Tributyltin oxide (TBTO) 56-35-9 and Dibutyltin dichloride (DBTC), 683-18-1 are listed on the Candidate List of Substances of Very High Concern for authorization of the Regulation (EC) No 1907/2006 of the European Parliament and of the Council

(REACH).

Test method: EN ISO 22744-1, -2 (textiles)

Test equipment: GC-MS.

EN ISO 17353 (water and sediment).

LOQ: 0.2 mg/kg

Triclosan and Triclocarban



Required limit value: Should not be present in products.

CAS RN: Triclosan: 3380-34-5, Triclocarban: 101-20-2

Properties: Bactericides. Triclosan is classified as a probable human carcino-

gen and bio accumulative.

Use: Antibacterial agent in clothes and other commodities.

Comments: The alternative to antibacterial agents during use is satisfactory

washing.

Legal background: Triclosan is banned within PT9 (product type 9) that includes

textiles, polymers and leather, according to the Biocidal Product

Regulation 528/2012.

Triclocarban is not on the active substance list for PT9 and thus

not allowed to use in textiles, polymers and leather.

Test method: EN 17134 (textile).

Test equipment: GC-MS, LC-MS.

LOQ: 10 mg/kg

Zincpyrithion









Required limit value: Should not be present in products.

CAS RN: 13463-41-7

Properties: Bactericide, fungicide and algicide.

<u>Use:</u>
Antibacterial and fungicide agent in articles. Commonly used in schampoo and previously in antifouling paint. May be used in

plastic articles

Comments: The alternative to antibacterial agents during use is satisfactory

washing.

If use of biocidal agents is essential, folpet, chlorocresol, propiconazole, azoxystrobin and fludioxonil are approved for PT9 according to the Biocidal Product Regulation (EU 528/2012).

Legal background: Zincpyrithion is on the list of temporarily permitted existing biocides

within PT9 (product type 9) that includes textiles, polymers and leather, according to the Biocidal Product Regulation

(EU 528/2012).

Test method: No standardised test method available.

Test equipment: GC-MS, LC-MS. LOQ: 1000 mg/kg (100 mg/kg via Zinc)

MISCELLANEOUS

pН



Limit value textiles: 4.0 – 8.5

Limit value leather: 3.5 – 7.0

Properties: A pH higher than 10 or lower than 3 can cause skin irritation.

Comments textiles: The pH value can easily be corrected by washing.

Legal background: None

Test method textiles: ISO 3071

Test equipment: pH meter. Accuracy: 0.2 pH units.

Test method leather: EN ISO 4045

Test equipment: pH meter. Accuracy: 0.2 pH units.

Proposition 65: Other chemicals listed with relevance to the materials referred to in this guidance document









Chemicals related to dyestuffs		
Substance name	CAS RN	Comment
Aniline	62-53-3	NSRL: 100 µg/day
Benzyl violet 4B	1694-09-3	NSRL: 30 µg/day
Carbon black (airborne, unbound particles of respirable size)	1333-86-4	No Safe Harbor Limit
C.I. Acid Red 114	6459-94-5	No Safe Harbor Limit
C.I. Direct Blue 15	2429-74-5	No Safe Harbor Limit
Cobalt sulfate	10124-43-3	No Safe Harbor Limit
Ethylene dichloride (1,2-Dichloroethane)	107-06-2	NSRL: 10 μg/day
Ethylene oxide	75-21-8	NSRL: 2 μg/day MADL: 20 μg/day
Michler's ketone	90-94-8	NSRL: 0.8 µg/day
Naphthalene	91-20-3	NSRL: 5.8 µg/day
1,3-Propane sultone	1120-71-4	NSRL: 0.3 µg/day
Trypan blue (commercial grade)	72-57-1	No Safe Harbor Limit
Hexachlorobenzene	118-74-1	NSRL: 0.4 µg/day

Chemicals related to materials		
Substance name	CAS RN	Comment
Antimony oxide (Antimony trioxide)	1309-64-4	Polyester catalyst No Safe Harbor Limit
Dichloromethane (Methylene chloride)	75-09-2	Triacetate (NSRL): 50 µg/day NSRL- Inhalation: 200 µg/day
N-Nitrosodimethylamine	62-75-9	Rubber NSRL: 0.04 µg/day

Biocides		
Substance name	CAS RN	Comment
Metham sodium	137-42-8	No Safe Harbor Limit
o-Phenylphenate, sodium	132-27-4	NSRL: 200 µg/day
o-Phenylphenol	90-43-7	No Safe Harbor Limit
2,4,6-Trichlorophenol	88-06-2	NSRL: 10 µg/day
Methyl bromide, as a structural fumigant	74-83-9	MADL - Inhalation: 810 μg/day

Flame retardants		
Substance name	CAS RN	Comment
Tris(1,3-dichloro-2-propyl) phosphate (TDCPP)	13674-87-8	NSRL: 5.4 µg/day
Vinyl bromide	593-60-2	No Safe Harbor Limit

Obsolete substances: Historically relevant substances, no longer in use.









Flame retardants		
Substance name	CAS RN	Comment
Tris(1-aziridinyl)-phosphine oxide (TEPA)	545-55-1	Legal limit: Shall not be used Test method: GC-MS
Tris(2,3-dibromopropyl)phosphate (TBPP)	126-72-7	Legal limit: Shall not be used Test method: EN ISO 17881-2 (textile); GC-MS, LC-MS, GC-ECD, LOQ: 5 mg/kg (non-textile)

APPENDICES

Appendix 1
Allergenic dye stuffs and Navy Blue (banned mordant dye)
Appendix 2
Banned arylamines
Appendix 3
Carcinogenic dye stuffs
Appendix 4
DBTs
Appendix 5
Chromium (VI) SVHC compounds
Appendix 6
SVHC lead compounds
Appendix 7
Regulations and limit values of formaldehyde
Appendix 8
Phthalate esters
Appendix 9
PAH - Polycyclic aromatic hydrocarbons

Appendix 1 - Allergenic dyestuffs and Navy Blue (banned mordant dye)

CI Name	CAS RN
C.I. Disperse Yellow 1	119-15-3
C.I. Disperse Blue 35	12222-75-2*
C.I. Disperse Blue 102	12222-97-8
C.I. Disperse Blue 106	12223-01-7*, 68516-81-4
C.I. Disperse Yellow 39	12236-29-2
C.I. Disperse Orange 37/59/76	13301-61-6*
C.I. Disperse Brown 1	23355-64-8
C.I. Disperse Blue 3	2475-46-9
C.I. Disperse Orange 1	2581-69-3
C.I. Disperse Yellow 3	2832-40-8*
C.I. Disperse Red 11	2872-48-2
C.I. Disperse Red 1	2872-52-8*
C.I. Disperse Red 17	3179-89-3
C.I. Disperse Blue 7	3179-90-6
C.I. Disperse Blue 26	3860-63-7
C.I. Disperse Yellow 49	54824-37-2
C.I. Disperse Blue 124	61951-51-7*
C.I. Disperse Yellow 9	6373-73-5
C.I. Disperse Orange 3	730-40-5*
Navy Blue	405-665-4 (EC #)
C.I Disperse Blue 1	2475-45-8*

*Disperse dyes banned in Germany

Appendix 2 - Banned arylamines

Arylamines listed in Annex XVII and/or the Candidate List of Substances of Very High Concern for authorization of Regulation (EC) No 1907/2006 (REACH)

Name	CAS RN	Candidate list	Annex XVII, Entry 43	Annex XVII, Entry 72
4,4-Methylene-bis[2-chloro-aniline]	101-14-4	X	X	
4,4-Methylenedianiline	101-77-9	×	×	
4,4'-oxydianiline	101-80-4	×	×	
4-chloroaniline	106-47-8		×	
o-Dianisidine	119-90-4		×	
4,4'-bi-o-toluidine	119-93-7		×	
p-Cresidine	120-71-8	×	×	
2,4,5-trimethylaniline	137-17-7		×	
4,4'-thiodianiline	139-65-1		×	
4-Aminoazobenzene	60-09-3	×	×	
4-methoxy-m-phenylenediamine	615-05-4		×	
4,4-Methylenedi-o-toluidine	838-88-0	×	×	
o-Anisidine	90-04-0	×	×	
2-Naphthylamine	91-59-8		×	
3,3-Dichlorobenzidine	91-94-1		×	
Biphenyl-4-ylamine	92-67-1	×	×	
Benzidine	92-87-5		×	
o-Toluidine	95-53-4	×	×	
4-Chloro-o-toluidine	95-69-2		X	
4-methyl-m-phenylenediamine	95-80-7	×	×	
o-Aminoazotoluene	97-56-3	×	×	
5-Nitro-o-toluidine	99-55-8		×	
4-chloro-o-toluidinium chloride	3165-93-3			X
2-Naphthylammoniumacetate	553-00-4			X
4-methoxy-m-phenylene diammo- nium sulphate; 2,4-diaminoanisole sulphate	39156-41-7			X
2,4,5-trimethylaniline hydrochloride	21436-97-5			Х

Appendix 3 - Carcinogenic dye stuffs

CI Name	CAS RN
C.I. Direct Brown 95	16071-86-6
C.I. Direct Black 38	1937-37-7*
C.I. Disperse Blue 1	2475-45-8**
C.I. Direct Blue 6	2602-46-2
C.I. Acid Red 26	3761-53-3
C.I. Basic Red 9	569-61-9**
C.I. Direct Red 28	573-58-0*
C.I. Basic Violet 14	632-99-5
C.I. Disperse Orange 11	82-28-0
C.I. Disperse Orange 149	85136-74-9
C.I. Solvent Blue 4	6786-83-0*
C.I. Basic Blue 26,	2580-56-5*
C.I. Basic Violet 3	548-62-9*, **
Michler's base	101-61-1*
4,4'-bis(dimethylamino)-4''- (methylamino)trityl alcohol	561-41-1*
C.I. Disperse Yellow 3	2832-40-8

* SVHC substances
** CMR fast track substances

Appendix 4 - Non exhaustive list of DBTs (dibutyl tin substances)

Constituent	CAS RN	No of carbons
R = oxide (DBTO)	818-08-6	0
R = acetate	1067-33-0	2
R = butoxide	3349-36-8	4
R = metylmaleate	15546-11-9	5
R = octanoate	4731-77-5	8
R = isoocanoate	85702-74-5	8
R = (monobutyl)maleate	15546-16-4	8
R = 2-etylhexanoate	2781-10-4	8
R = laurate	77-58-7	12
R = palmitate	13323-63-2	16
R = stearate	5847-55-2	18
R = oleate	13323-62-1	18
R = linoleate	85391-79-3	18
R = linolenate	95873-60-2	18

Appendix 5 - Chromium (VI) SVHC compounds

Chromium (VI) substances listed in Annex XIV and the Candidate List of Substances of Very High Concern for authorization of Regulation (EC) No 1907/2006 (REACH)

Name	CAS RN
Ammonium dichromate	7789-09-5
Potassium chromate	7789-00-6
Potassium dichromate	7778-50-9
Sodium chromate	7775-11-3
Sodium dichromate dehydrate	7789-12-0, 10588-01-9
Strontium chromate	7789-06-2
Chromium trioxide	1333-82-0
Chromic acid	7738-94-5
Dichromic acid	13530-68-2
Lead chromate	7758-97-6
Lead sulfochromate	1344-37-2
Lead chromate molybdate sulphate	12656-85-8
Dichromium tris(chromate)	24613-89-6
Potassium hydroxyoctaoxodizincatedichromate	11103-86-9
Pentazinc chromate octahydroxide	49663-84-5

Appendix 6 - SVHC lead metal and its compounds

Name	CAS RN
Lead (metal)	7439-92-1
Lead chromate	7758-97-6
Lead sulfochromate	1344-37-2
Lead chromate molybdate sulphate	12656-85-8
Lead dipicrate	6477-64-1
Lead styphnate	15245-44-0
Lead diazide	13424-46-9
Lead hydrogen arsenate	7784-40-9
Lead monoxide (Lead oxide)	1317-36-8
Orange lead (Lead tetroxide)	1314-41-6
Lead bis(tetrafluoroborate)	13814-96-5
Trilead bis(carbonate)dihydroxide	1319-46-6
Lead titanium trioxide	12060-00-3
Lead titanium zirconium oxide	12626-81-2
Lead(II) bis(methanesulfonate)	17570-76-2
Silicic acid, lead salt	11120-22-2
Silicic acid (H2Si2O5), barium salt (1:1), lead-doped	68784-75-8
Acetic acid, lead salt, basic	51404-69-4
Lead oxide sulfate	12036-76-9
[Phthalato(2-)]dioxotrilead	69011-06-9
Dioxobis(stearato)trilead	12578-12-0
Fatty acids, C16-18, lead salts	91031-62-8
Lead cynamidate	20837-86-9
Lead dinitrate	10099-74-8
Pentalead tetraoxide sulphate	12065-90-6
Pyrochlore, antimony lead yellow	8012-00-8
Sulfurous acid, lead salt, dibasic	62229-08-7
Tetraethyllead	78-00-2
Tetralead trioxide sulphate	12202-17-4
Trilead dioxide phosphonate	12141-20-7
Lead di(acetate)	301-04-2

Appendix 7 - Regulations and limit values of formaldehyde

Country	Regulations/Requirements	Objection Limit / Limit
France	Official Gazette of the French Republic, Notification 97/0141/F	Textiles not in direct skin contact: 400ppm
Finland	Decree on Maximum Amounts of Formaldehyde in Certain Textiles pro- ducts (Decree 210/1988)	Textiles not in direct skin contact: 300ppm
China	Limits of Formaldehyde Contents in Textiles GB18401-2003	Textiles for infants and babies ≤ 20ppm Textiles in direct skin contact ≤ 75ppm Textiles not in direct skin contact ≤ 300ppm
Japan	Japanese Law 112	Textiles for infants: not detectable Textiles in direct skin contact: 75ppm
Vietnam	Circular no 23/2016/TT-BCT	Textiles for babies under 36 months: 30 mg/kg. Textiles in direct skin contact: 75 mg/kg. Textiles not in direct skin contact: 300 mg/kg
USA	Federal Hazardous Substances Act (FHSA)	Consumer products containing more than 1% formaldehyde must be labelled with a warning.
Eurasian Customs Union (Armenia,	P TC 007/2011 On "Safety of Products intended for children and adolescents" TP TC 017/2011 On Safety of Light	Mass fraction of free Formaldehyde babies up to 36 months: 20 mg/kg for 1st and 2nd layer of products and 300 mg/kg for 3rd layer
Belarus, Kazakhstan Kyrgyzstan and Russia)	Industry Products GOST 50729-95 (Textiles. Limit permissible concentration of free formal-dehyde)	Mass fraction of free Formaldehyde for children and adolescents: 75 mg/kg for 1st and 2nd layer of products and 300 mg/kg for 3rd layer Apply less than 20 mg free formaldehyde/kg as a
	dehyde)	Apply less than 20 mg free formaldehyde/kg as a customs requirement.

Appendix 8 - Phthalate esters

Substances listed in Annex XIV, Annex XVII and/or the Candidate List of Substances of Very High Concern for authorization of Regulation (EC) No 1907/2006 (REACH)

Name	CAS RN	Candidate list	Annex XIV	Annex XVII
Bis (2-ethylhexyl) phthalate) (DEHP)	117-81-7	Х	X	x (entry 51)
Dibutyl phthalate (DBP)	84-74-2	X	Χ	x (entry 51)
Benzyl butyl phthalate (BBP)	85-68-7	X	Χ	x (entry 51)
Diisobutyl phthalate (DIBP)	84-69-5	X	Χ	x (entry 51)
Di-isononyl phthalate (DINP)	28553-12-0 68515-48-0			x (entry 52)
Di-isodecyl phthalate (DIDP)	26761-40-0 68515-49-1			x (entry 52)
Di-n-octyl phthalate (DNOP)	117-84-0			x (entry 52)
1,2-benzenedicarboxylic acid, di-C6-8-branched alkylesters, C7- rich	71888-89-6	X	X	x (entry 72)
Di-n-pentyl phthalate (DPP)	131-18-0	X	Χ	x (entry 72)
Di-n-hexyl phthalate (DnHP)	84-75-3	X	X	x (entry 72)
Diisopentyl phthalate	605-50-5	X	Χ	x (entry 72)
Bis (2-methoxyethyl) phthalate	117-82-8	X	Х	x (entry 72)
1,2-Benzenedicarboxylic acid, dipentylester, branched and linear	84777-06-0	X	X	
n-pentyl-isopentyl phthalate	776297-69-9	X	Х	
1,2-Benzenedicarboxylic acid, di-C7-11-branched and linear alkyl esters	68515-42-4	X	X	
1,2-Benzenedicarboxylic acid, dihexyl ester, branched and linear	68515-50-4	X	X	
1,2-Benzenedicarboxylic acid, mixed decyl and hexyl and octyl diesters, with ≥ 0.3% of dihexyl phthalate	68648-93-1	X	X	
1,2-Benzenedicarboxylic acid, di-C6-10-alkyl esters, with ≥ 0.3% of dihexyl phthalate	68515-51-5	X	Х	
Dicyclohexyl phthalate (DCHP)	84-61-7	X		
Diisohexyl phthalate	71850-09-4	X		

Appendix 9 - PAH - Polycyclic aromatic hydrocarbons

PAH substances listed in Annex XVII and/or the Candidate List of Substances of Very High Concern for authorization of the Regulation (EC) No 1907/2006 (REACH). The German GS standard is not legally binding.

Name	CAS RN	Candidate list	Annex XVII, Entry 50	Annex XVII, Entry 72	German GS standard
Benzo(a)anthracene	56-55-3	Χ	X	X	X
Benzo(a)phenanthrene (chrysene)	218-01-9	X	X	Х	X
Benzo(a)pyrene	50-32-8	Χ	Χ	X	X
Benzo(b)fluoranthene	205-99-2		X	X	X
Benzo(j)fluoranthene	205-82-3		X	Х	X
Benzo(k)fluoranthene	207-08-9	X	X	X	X
Dibenzo(a,h)anthracene	53-70-3		X	X	X
Benzo[e]pyrene	192-97-2		X	X	X
Benzo[ghi]perylene	191-24-2	Χ			X
Anthracene	120-12-7	Х			X
Anthracene oil distillation fractions		X			
Fluoranthene	206-44-0	Х			X
Phenanthrene	85-01-8	Χ			X
Pyrene	129-00-0	Х			X
Naphthalene	91-20-3				X
Indeno[1,2,3-cd]pyrene	193-39-5				X



