


350 m³/h mot max 30dBa. Full luftmengde hele tiden
Fettfilter og Lys.
Lakkert stål.

DIAGRAM

TRYKKFALL OG LYD

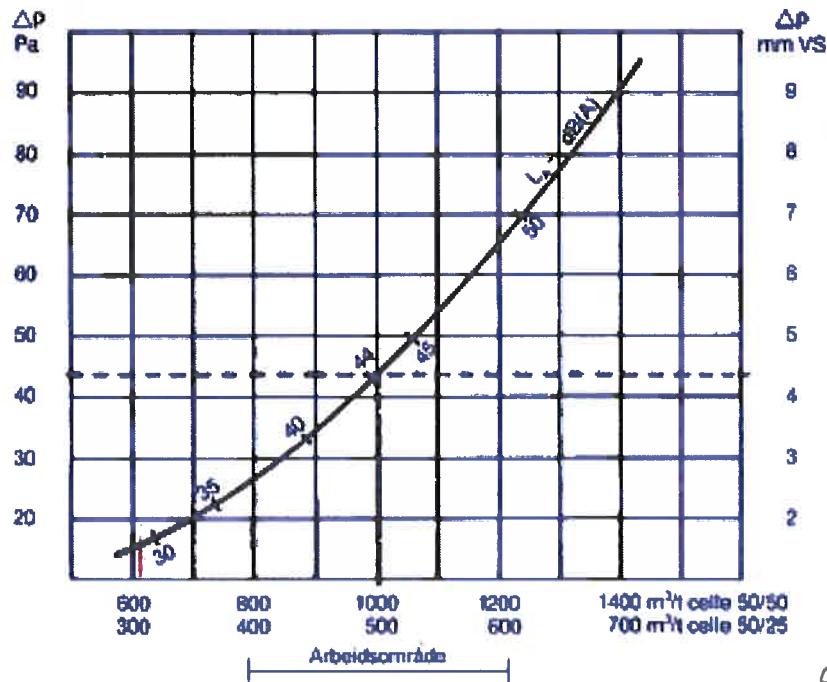

ARBEIDSSOMRÅDE FOR CELLER

Type	Anbefalt luftmengde	Filterflate
Celle 50/50	1000 m ³ /t	0.22 m ²
Celle 50/25	500 m ³ /t	0.11 m ²

VEKT OG EMBALLASJE

Type	Emballasje mål i mm	Vekt inkl. emb
V-1 50/25	300 x 230 x 570	4.0 kg
V-2 50/25	300 x 230 x 1070	8.5 kg
V-3 50/25	300 x 230 x 1570	11.0 kg
V-1 50/50	530 x 400 x 570	7.0 kg
V-2 50/50	530 x 400 x 1070	11.5 kg
V-3 50/50	530 x 400 x 1570	18.0 kg
A-1 50/25	300 x 170 x 570	3.5 kg
A-2 50/25	300 x 170 x 1070	6.5 kg
A-3 50/25	300 x 170 x 1570	9.0 kg
A-1 50/50	530 x 250 x 570	6.0 kg
A-2 50/50	530 x 250 x 1070	9.0 kg
A-3 50/50	530 x 250 x 1570	14.0 kg