

Component list

 Style no: **W-SH-03** Style: **Womens SHIRT long sleeve**


Date: 15-08-19

Material	Description	Placement	Amount
Fabric			
Mainfabric			
Composition	80% combed cotton 20% polyester		
Construction	Plain weave, open not tight construction for good air permeability. 125-130 g/m2. Crease resist finish.		
Colour	Middle blue (customers own colour)		
Interlining	Fused interling, white	collar, cuff, CF	
Trimmings			
Thread; sewing and overlock	Core spun polyester. Colour: Tone in tone blue		
Logo	Embroidery logo tone in tone blue		
Buttons	12 mm 4-hole polyester or polyamid 6.6 with narrow edge. Tone in tone blue. Sparebutton on carelabel.	CF, cuff	12+1
Buttons	9 mm 4-hole polyester or polyamid 6.6 with narrow edge. Tone in tone blue. Sparebutton on carelabel.	cuff slit	2
Mainlabel	Woven polyester satin label, grey with midblue letter	CB neck	1
Sizelabel	Woven polyester satin label, grey with midblue letter	CB neck	1
Carelabel	Woven polyester satin label, white with black print	Left sideseam	1


Inside label



Size label



Shirts: W-SH-03

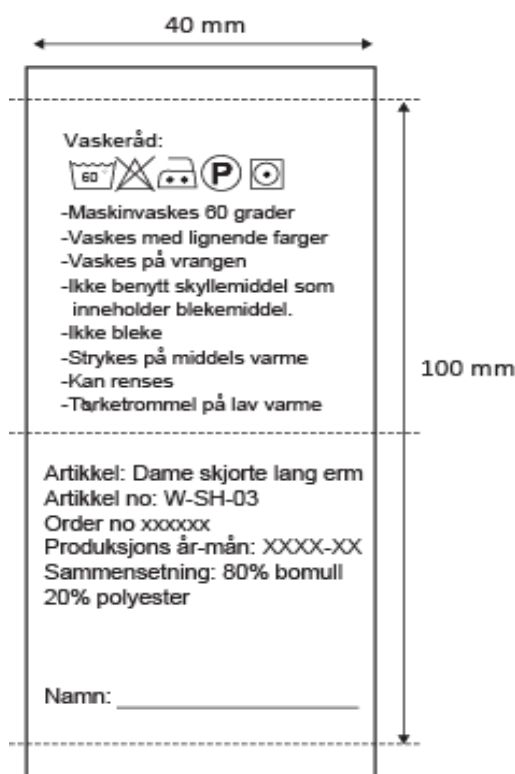

To be packed with stand-up in collar, folded with plastic gem/pins (no needles)

Technical specifications

Style no: **W-SH-03** Style: **Womens SHIRT long sleeve**

Date: 15-08-05

