


Component list

 Style no: **W-CA-09** Style: **Womens CARDIGAN**

Date: 15-08-19


Material	Description	Placement	Amount
Fabric			
Mainfabric:			
Composition	50% merino wool 50% acrylic		
Composition	Half milano. 10 gauge. Antipilling treated yarn, NM 2/28		
Colour	Greymelange (customers own colour)		
Woven tape	Fishbonetape 20 mm	Inside CF	
Trimmings			
Thread; sewing and overlock	Core spun polyester. Colour: Tone in tone.		
Embroidery	Embroidery logo. Tone in tone grey		
Buttons	15 mm pressbutton. Brusched silver metal with engraved logotype. Sparebutton in small plasticbag on carelabel.	CF	5+1
Mainlabel	Woven polyester satin label, grey with midblue letters	CB neck	1
Sizelabel	Woven polyester satin label, grey with midblue letters	CB neck	1
Carelabel	Woven polyester satin label, white with black print	Left sideseam	1

Inside label




55 mm
18 mm

Size label




7 mm
10 mm
10 mm
7 mm
18 mm

**cardigan:
W-CA-09**

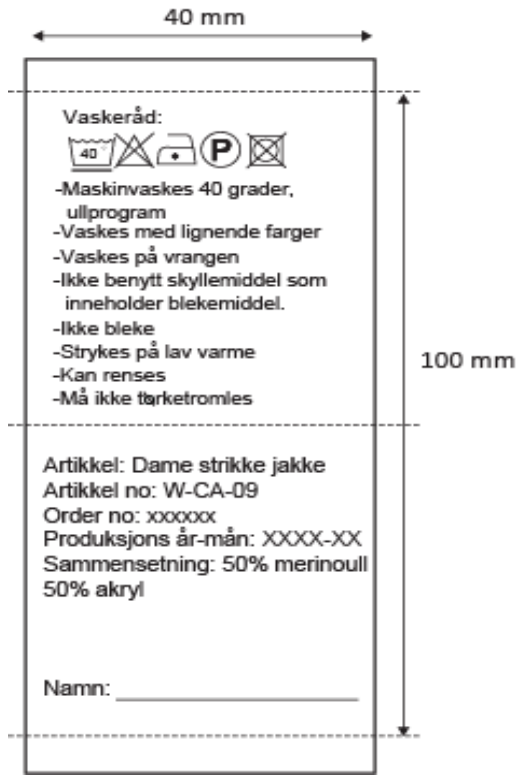

40 mm
100 mm

Vaskeråd:



- Maskinvaskes 40 grader, ullprogram
- Vaskes med lignende farger
- Vaskes på vrangen
- Ikke benytt skyllemiddel som inneholder blekemiddel.
- Ikke bleke
- Stryk på lav varme
- Kan renses
- Må ikke tørketromles

Artikkel: Dame strikke jakke
 Artikkel no: W-CA-09
 Order no: xxxxxx
 Produksjons år-mån: XXXX-XX
 Sammensetning: 50% merinoull 50% akryl

Namn: _____

Technical specifications



VINMONOPOLET

Style no: **W-CA-09** Style: **Womens CARDIGAN**

Date: 15-08-05

