


Component list

 Style no: **W-TR-01** Style: **Womens TROUSERS**

Date: 13/07/17


Material	Description	Placement	Amount
Fabric			
Composition	54% polyester 42% wool (maximum 5% fibres above 30 micron) 4% elastane		
Colour	Dark grey melange (standard colour)		
Construction	Plain weave, Approx 200 g/m2		
WB inside	Main fabric with woven tape with two silicone band	WB inside	
Interlining	Fused interling black	WB and fly	
Binding	Solid black.	fly, WB	
Lining 1	Taffeta 60 g/m2. 100% polyester. Black	Knee lining, fr panel	
Lining 2	65% polyester 35% cotton 2/1 Twill or plain weave. Black	Pockets	
Trimmings			
Thread; sewing and overlock	Core spun polyester. Colour: Tone in tone		
Buttons	15 mm. 4-hole polyester or polyamid 6.6 with narrow edge. Black. Sparebuttons on carelabel.		1+1
Zipper	4 mm spiral nylon zip. Black tape and puller.		1
Hooks and eye	Silver metal hook and eye	CF waistband	1
Mainlabel	Woven polyester satin label, grey with middleblue letters	Left front panel	1
Sizelabel	Woven polyester satin label, grey with middleblue letters	Left front panel	1
Carelabel	Woven polyester satin label, white with black print	Left front panel	1

Inside label




55 mm
18 mm

Size label




7 mm
10 mm
10 mm
7 mm
18 mm

**Trousers:
W-TR-01**

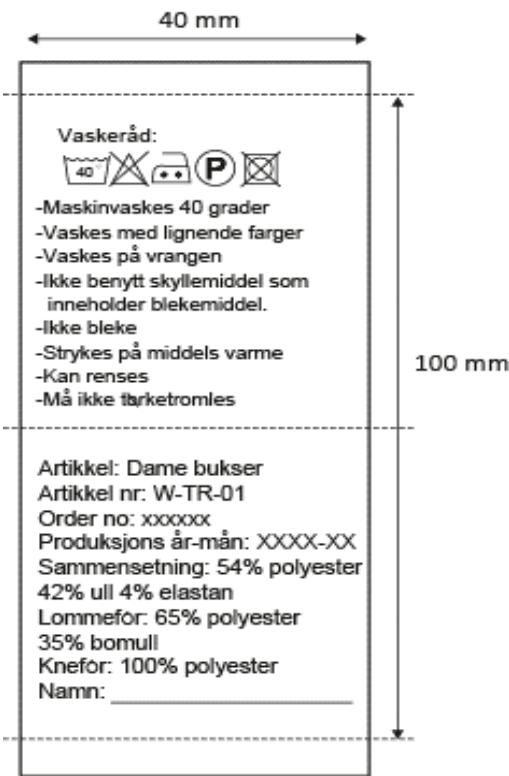

40 mm
100 mm



Vaskeråd:

 -Maskinvaskes 40 grader
 -Vaskes med lignende farger
 -Vaskes på vrangen
 -Ikke benytt skyllemiddel som inneholder blekemiddel.
 -Ikke bleke
 -Stryk på middels varme
 -Kan renses
 -Må ikke tørketromles

Artikkel: Dame bukser
 Artikkel nr: W-TR-01
 Order no: xxxxxx
 Produksjons år-mån: XXXX-XX
 Sammensetning: 54% polyester
 42% ull 4% elastan
 Lommefôr: 65% polyester
 35% bomull
 Knefôr: 100% polyester
 Namn: _____

Technical specifications

Style no: **W-TR-01** Style: **Womens TROUSERS**

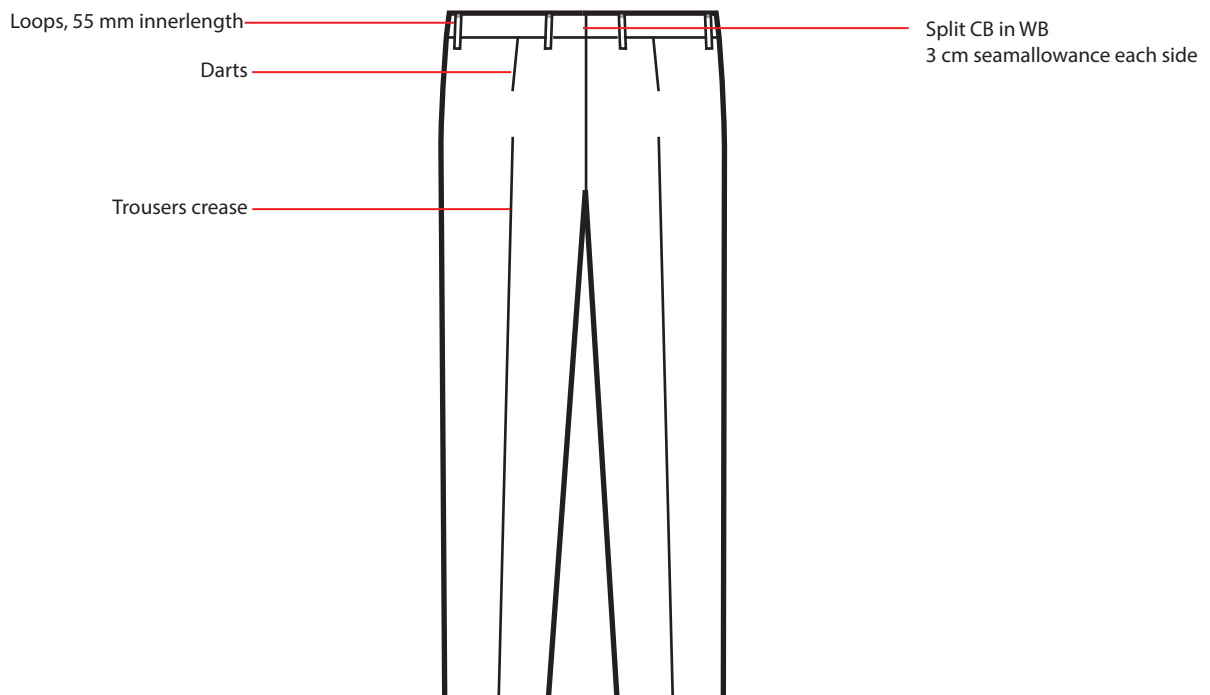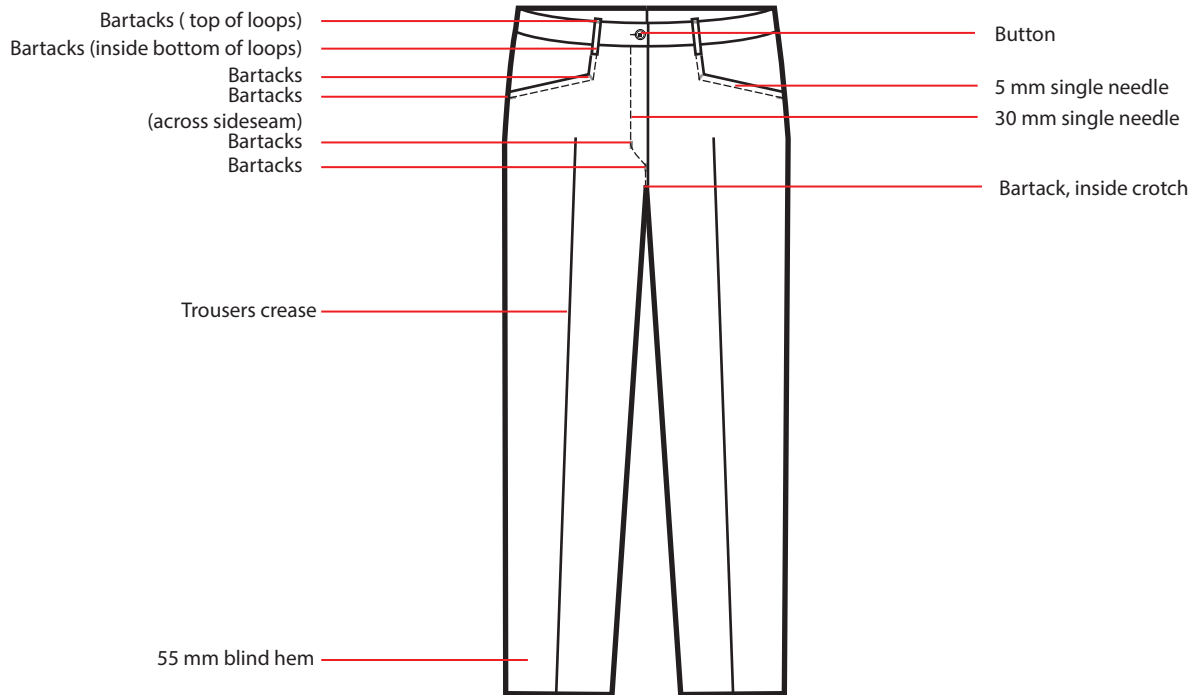Date: 19/07/17



Technical specifications


Style no: **W-TR-01** Style: **Womens TROUSERS inside**

Date: 15-08-05

- Main fabric inside WB
- Binding in bottom edge of WB
- Binding edge of both sides of fly
- Ribbon tape with silicon band inside WB
- Hook and eye
- Mens constructed fly
- Pocketbags between front panel and knee lining. Clean inside.




Overlock in edge

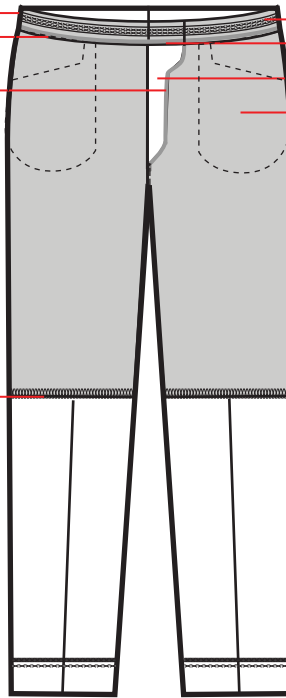

Overlock in edge


3cm seam allowance each side in CB where split seams

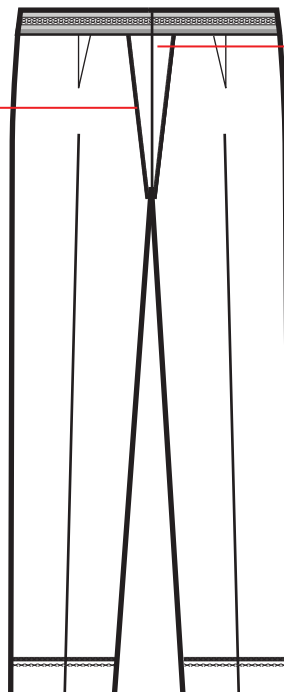

Measurementlist

 Style no: **W-TR-01** Style: **Womens TROUSERS**

Date: 19/07/17

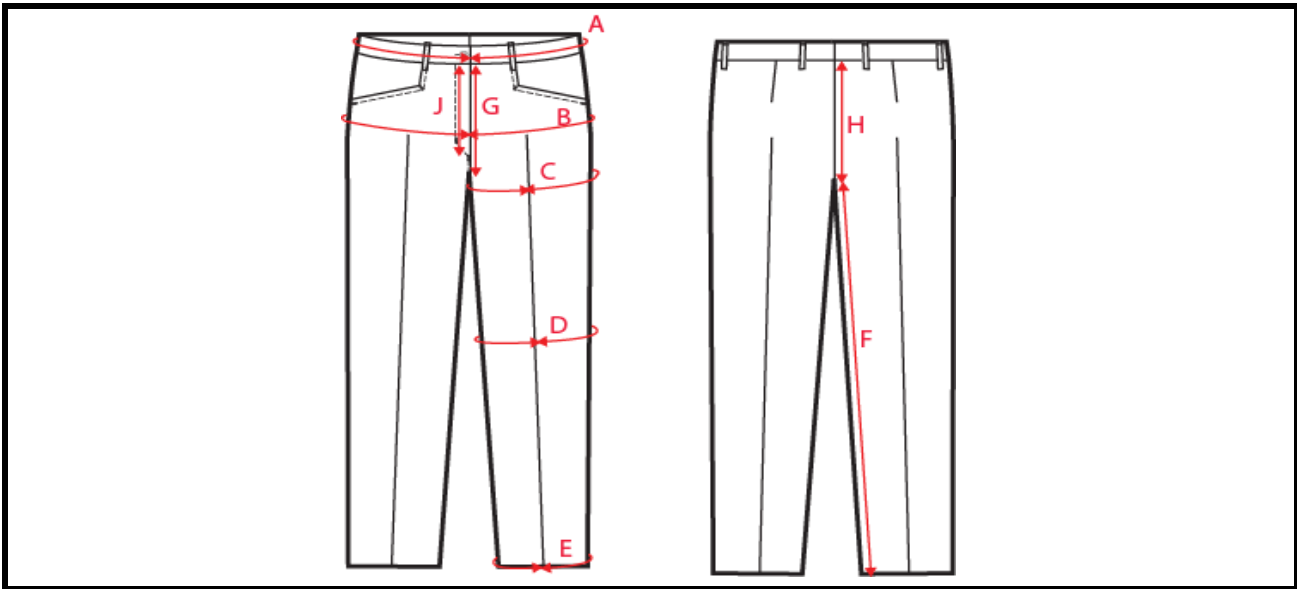

		34	36	38	40	42	44	46	48	50	52	54	56	
A	Waist	74	78	82	86	90	94	98	103	109	115	121	127	
B	Seat, 2/3 of fr rise	92	96	100	104	108	112	116	121	126	131	136	141	
C	Thigh	58	60	62	64	66	68	70	73	76	79	82	85	
D	Knee	41	42,5	44	45,5	47	48,5	50	51,5	53	54,5	56	57,5	
E	Bottom of leg	38	39	40	41	42	43	44	45	46	47	48	49	
G	Front rise, ex WB	20	20,5	21	21,5	22	22,5	23	23,5	24	24,5	25	25,5	
H	Back rise, ex WB	32,5	33,5	34,5	35,5	36,5	37,5	38,5	39,5	40,5	41,5	42,5	43,5	
	Waistband	4	4	4	4	4	4	4	4	4	4	4	4	
J	Zipper length	14	14	14	14	14	15	15	15	16	16	16	16	
F	Inseam	76	3476	3676	3876	4076	4276	4476	4676					
	Inseam	80			4882	4080	4280	4480	4680	4880	5080	5280	5480	5680
	Inseam	82		3682										
	Inseam	84	3484		2884	4084	4284	4484	4684	4885				
	Inseam	86		3686							5086	5286	5486	5686
	Inseam	88			3888	4088	4288	4488	4688	4888				