

# Component list

 Style no: **M-TR-02** Style: **Mens TROUSERS**


Date: 13/07/17

Material	Description	Placement	Amount
<b>Fabric</b>			
Composition	54% polyester 42% wool (maximum 5% fibres above 30 micron) 4% elastane		
Colour	Dark grey melange (standard colour)		
Construction	Plain weave, Approx 200 g/m2		
WB inside	Main fabric with woven tape with two silicone band	WB inside	
Interlining	Fused interling black	WB and fly	
Binding	Solid black.	fly, WB	
Lining 1	Taffeta 60 g/m2. 100% polyester. Black	Knee lining, fr panel	
Lining 2	65% polyester 35% cotton 2/1 Twill or plain weave. Black	Pockets	
<b>Trimmings</b>			
Thread; sewing and overlock	Core spun polyester. Colour: Tone in tone		
Buttons	15 mm. 4-hole polyester or polyamid 6.6 with narrow edge. Black. Sparebuttons on carelabel.		1+1
Zipper	4 mm spiral nylon zip. Black tape and puller.		1
Hooks and eye	Silver metal hook and eye	CF waistband	1
Mainlabel	Woven polyester satin label, grey with middleblue letters	Left front panel	1
Sizelabel	Woven polyester satin label, grey with middleblue letters	Left front panel	1
Carelabel	Woven polyester satin label, white with black print	Left front panel	1


### Inside label



### Size label



### Trousers: W-TR-02

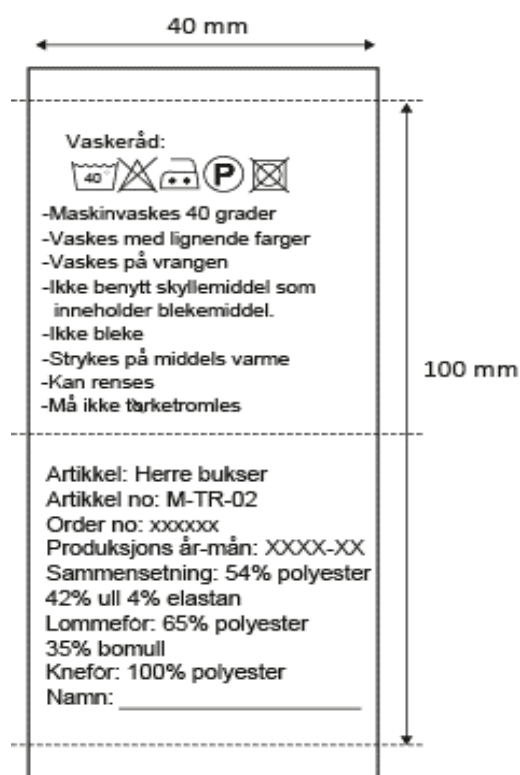



# Technical specifications



VINMONOPOLET

Style no: **M-TR-02**    Style: **Mens TROUSERS**

Date: 19/07/17

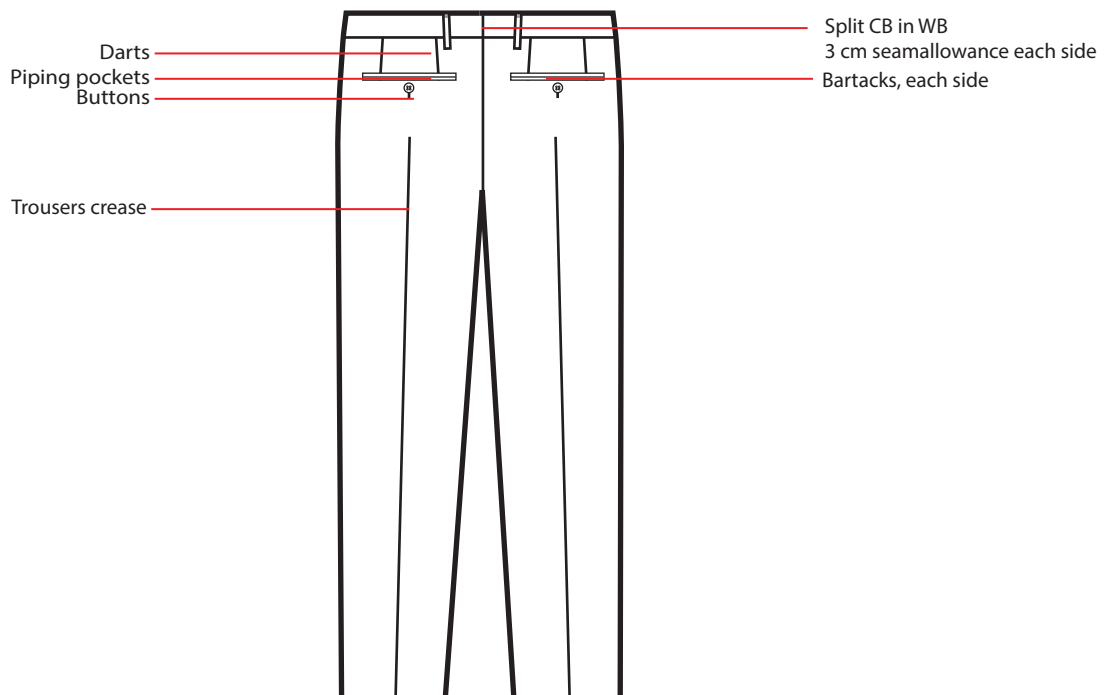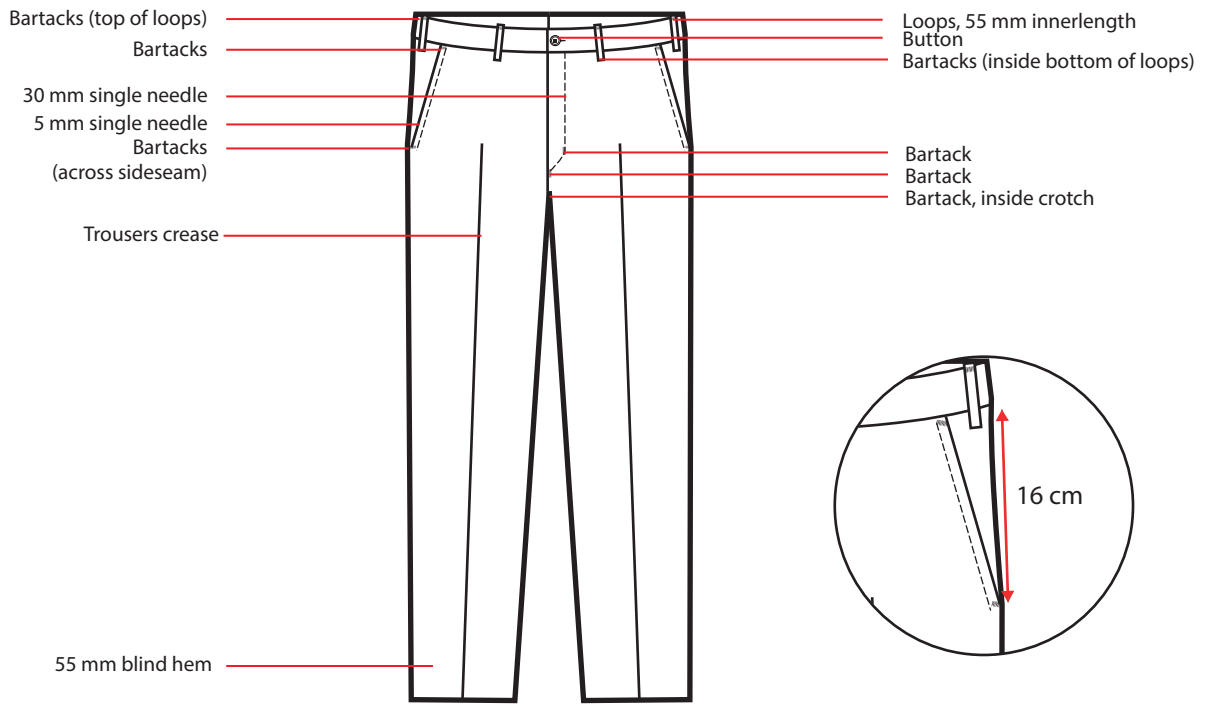

# Technical specifications


Style no: **M-TR-02**      Style: **Mens TROUSERS inside**

Date: 15-08-05

- Main fabric inside WB
- Binding in bottom edge of WB
- Binding edge of both sides of fly
- Ribbon tape with silicon band inside WB
- Hook and eye
- Mens constructed fly
- Pocketbags between front panel and knee lining. Clean inside.



Overlock in edge

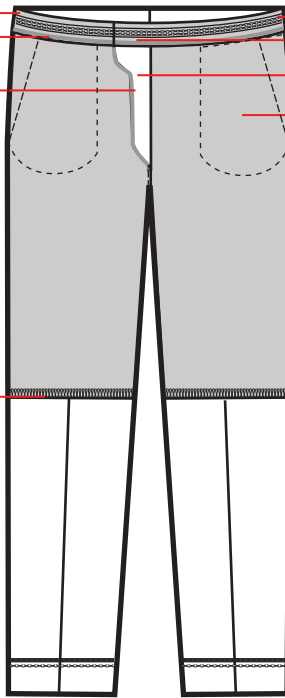

Overlock in edge

17 cm

3cm seam allowance each side in CB where split seams

