

Component list

 Style no: **W-PO-07** Style: **Womens POLO shirt**


Date: 13/07/17

Material	Description	Placement	Amount
Fabric			
Mainfabric:			
Composition	100% combed cotton		
Composition	Piqueknit. 180-200 g/m2		
Colour	Middleblue melange		
Interlining:	Fused interling	front placket	
Ribbontape	Fishbonetape 25 mm. Tone in tone blue.	front placket	
Trimmings			
Thread; sewing			
and overlock	Core spun polyester. Colour: Tone in tone blue		
Logo	Embroidery tone in tone blue.		
Buttons	12 mm 4-hole polyester or polyamid 6.6 with narrow edge.	CF	4+1
	Tone in tone blue. Sparebutton on carelabel		
Mainlabel	Woven polyester satin label, grey with midblue letters	CB neck	1
Sizelabel	Woven polyester satin label, grey with midblue letters	CB neck	1
Carelabel	Woven polyester satin label, white with black print	Left sideseam	1


Inside label



Size label



Polo shirt: W-PO-07

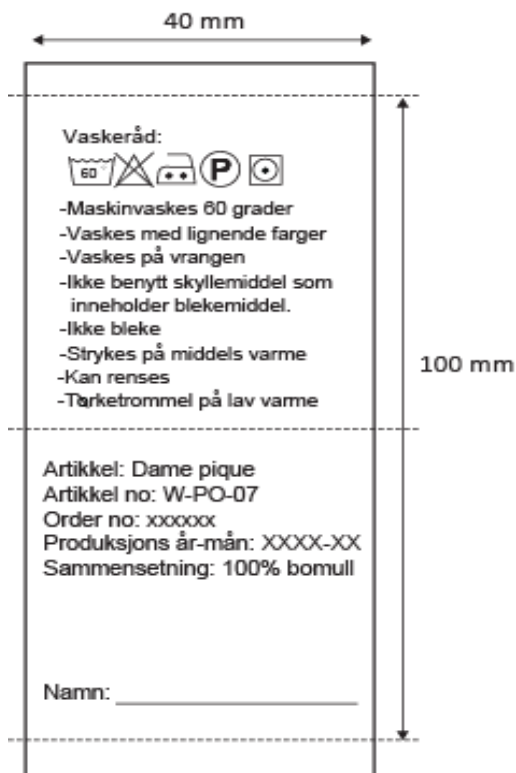

Technical specifications

Style no: **W-PO-07** Style: **Womens POLO SHIRT**

Date: 13/07/17

